

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/028817 A1**

(51) International Patent Classification<sup>7</sup>: **B41J 2/175**

(21) International Application Number:  
PCT/JP2003/012421

(22) International Filing Date:  
29 September 2003 (29.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002-287833 30 September 2002 (30.09.2002) JP

(71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA [JP/JP]**; 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **INOUE, Ryoji**


[JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **ISHI-NAGA, Hiroyuki [JP/JP]**; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **KUWABARA, Nobuyuki [JP/JP]**; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **OHASHI, Tetsuya [JP/JP]**; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **OGURA, Hideki [JP/JP]**; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

(74) Agent: **TANI, Yoshikazu**; 6-20, Akasaka 2-chome, Minato-ku, Tokyo 107-0052 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,

[Continued on next page]

(54) Title: **LIQUID SUPPLY SYSTEM, FLUID COMMUNICATING STRUCTURE, INK SUPPLY SYSTEM, AND INKJET RECORDING HEAD UTILIZING THE FLUID COMMUNICATING STRUCTURE**

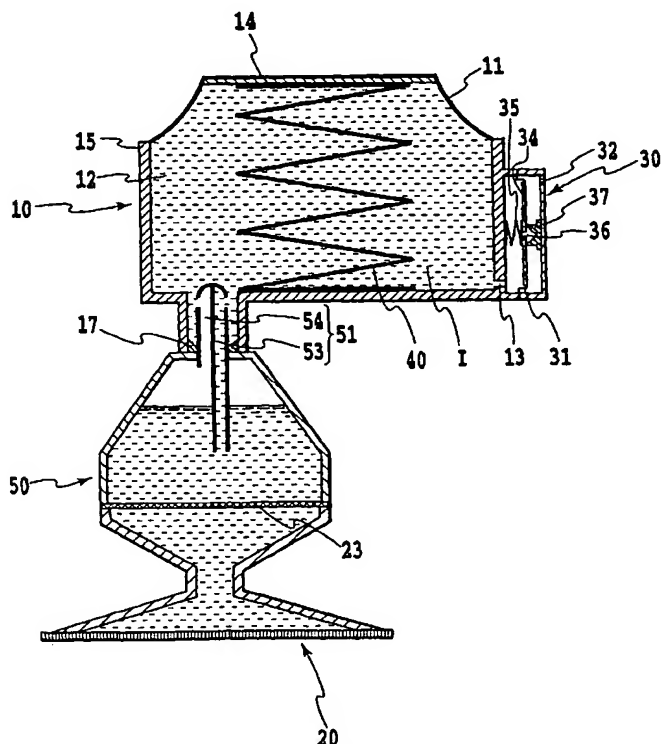

(57) Abstract: A liquid (ink) supply system having a closed structure with respect to an inkjet recording head is configured such that a gas hindering a recording operation and a liquid supply operation can be rapidly and smoothly eliminated from a liquid supply system without involving any complication in structure. An ink tank (10) and a liquid chamber (50) for leading ink supplied to the recording head (20) are brought into fluid communication via two communication channels (53 and 54). Thus, in the state where the gas exists inside the liquid chamber, the ink is moved from the ink tank (10) via one communication channel (53), while the gas is transferred to the ink tank (10) via the other communication channel (54).

WO 2004/028817 A1



RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT,  
TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) **Designated States (regional):** ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

JC17 Rec'd PCT/PTO 24 MAR 2005

## DESCRIPTION

23 / pts

LIQUID SUPPLY SYSTEM, FLUID COMMUNICATING STRUCTURE, INK  
SUPPLY SYSTEM, AND INKJET RECORDING HEAD UTILIZING THE FLUID  
5 COMMUNICATING STRUCTURE

## TECHNICAL FIELD

The present invention relates to a fluid communicating structure for supplying a liquid such as an ink to, for example,  
10 a recording head or pen as a liquid-consuming section from an ink tank as a liquid containing section with stability and no waste of the liquid and for discharging a gas existing in the liquid-consuming section to the liquid containing section. The invention also relates to a liquid supply system  
15 utilizing the structure and an inkjet recording apparatus utilizing the system.

## BACKGROUND ART

Recently, apparatus utilizing or consuming a liquid,  
20 e.g., inkjet recording apparatus which form an image on a recording medium by applying an ink that is a liquid onto the recording medium using an inkjet recording head are widely used for printing operations including color printing because they make relatively low noises during printing and they are  
25 capable of forming small dots with a high density. One type of such inkjet recording apparatus has an inkjet recording

head that is supplied with an ink from an ink tank integrally or separably attached thereto, a carriage that carries the recording head and scans the recording head relative to a recording medium in a predetermined direction, and transport  
5 means that transports the recording medium relative to the recording head in a direction orthogonal to the predetermined direction (sub-scanning), the apparatus performing recording by ejecting the ink during main scanning of the recording head. In some apparatus, a recording head capable of ejecting  
10 a black ink and color inks such as yellow, cyan, and magenta inks is mounted on a carriage to allow not only monochromatic printing of text images using the black ink but also full-color printing through changing of an ejecting ratio among the inks.

In such inkjet recording apparatus, it is important  
15 to discharge a gas such as air which is about to enter or has entered an ink supply channel properly.

Gases that can enter a supply system are generally categorized into four types according to factors generating them as follows:

20 (1) gasses that enter through ink ejection openings or orifices of a print head or gasses generated as a result of an ejecting operation

(2) products of separation of gasses that have dissolved in ink

25 (3) gasses that enter a supply channel as a result of gas transmission through the material of which the supply



channel is made up

(4) gasses that enter when a cartridge type ink tank is replaced

A liquid path formed in an inkjet recording or print head has a very fine configuration, and ink supplied from an ink tank to the recording head is therefore required to be in a clean condition in which there is no foreign substance such as dust in the ink. Specifically, when foreign substances such as dust have entered, a problem arises in that the foreign substances clog up an ejection opening that is an especially narrow part of an ink channel in the recording head or a part of the liquid path in direct communication with the ejection opening. As a result, an ink ejecting operation can not be performed properly, and the function of the recording head may not be recovered.

Under such circumstances, a configuration is frequently employed in which a filter member for removing foreign substances is provided in an ink supply channel between a recording head and an ink supply needle that is stuck into an ink tank to make it possible to prevent foreign substances from entering the recording head side with the filter member.

Incidentally, there is a recent trend toward greater numbers of ejection openings for ejecting ink in order to achieve recording at higher speeds, and drive signals having higher and higher frequencies are coming into use to be applied to elements for generating energy for ink ejection. This

has resulted in an abrupt increase in ink consumption per unit time.

This obviously results in an increase in the amount of ink that passes through a filter member and, in order to  
5 reduce pressure loss attributable to a filter member, it is effective to provide a filter member having a large area by enlarging a part of the supply channel. As a result, when bubbles enter the supply channel, they are apt to stay in a space in the enlarged part located upstream of the filter  
10 member and will become unremovable, in which state a problem arises in that smooth supply of the ink is hindered. There is another possibility that the gas residing in the supply channel enters the ink led to the ejection opening as microscopic bubbles to cause problems such as disabled ink  
15 ejection.

It is therefore strongly desired to remove air residing in an ink supply channel quickly, and there are several solutions to this.

One solution is to perform a cleaning operation as  
20 described below.

An inkjet recording head performs printing by ejecting ink that is a liquid, for example, in the form of droplets from an ejection opening that is provided opposite to a recording medium. Therefore, printing may fail for causes  
25 such as an increase in ink viscosity or solidification of the ink attributable to evaporation of the ink solvent through

the ejection opening, deposition of dust at the ejection opening, and clogging of the ejection opening attributable to invasion of bubbles into a liquid channel inside the ejection opening.

5           Under such circumstances, an inkjet recording apparatus is equipped with capping means for covering the ejection openings of the recording head during non-printing operations or a wiping member for cleaning the surface of the recording head where the ejection openings are formed (ejection opening  
10   forming surface) as occasions demand. The capping means functions not only as a cover for preventing ink at the ejection opening from being dried as described above when printing is ceased. When the ejection opening is clogged, the capping means covers the ejection opening forming surface with a  
15   capping member and exerts a negative pressure, for example, with a suction pump that is in communication with the interior of the capping member to evacuate the ink from the ejection opening, the capping means thus providing the function of eliminating any ink ejection failure attributable to clogging  
20   due to solidification of the ink at the ejection opening, the ink with increased viscosity in the liquid path, or bubbles contained therein.

A process of discharging ink by force to eliminate such ink ejection failures is referred to as a cleaning operation,  
25   and it is performed when printing is resumed after the apparatus has been out of operation for a long time or when

a user notices that the quality of recorded images has deteriorated and operates, for example, a cleaning switch. Further, the process is accompanied by an operation of wiping the ejection opening forming surface with a wiping member  
5 constituted by an elastic plate made of rubber after evacuating the ink by force as thus described.

There is another approach in which, at the time of initial charging to charge the flow channel or liquid path of a recording head with ink or at the time of a cleaning operation  
10 performed when an ink tank is replaced, a suction pump is driven at a high speed to exert a great negative pressure upon the ejection opening forming surface that is capped and in which a high flow rate is achieved in the ink supply channel to discharge bubbles contained therein.

15 However, when the surface area of a filter member is increased to suppress a dynamic or kinetic pressure of the filter member as described above, the sectional area of the flow channel also increases. As a result, even when a great negative pressure is generated in the flow channel during  
20 the cleaning operation as ascribed above, a flow rate that is high enough to transport bubbles effectively will not be generated, and it is quite difficult to remove the entrapped bubbles from the ejection opening side using a suction pump. That is, the ink must be at a predetermined flow rate when  
25 passing the filter as a requirement to be satisfied to allow the bubbles to pass the filter as a result of an ink flow

caused by the suction pump, and a great pressure difference must be generated across the filter to generate such a flow rate. This is normally achieved by increasing the resistance of the flow channel through a reduction of the filter surface  
5 area or increasing the flow volume of the suction pump. However, when the filter is made smaller, its performance of supplying ink to the head is reduced and, when it is attempted to remove a gas using a high flow volume, a great amount of ink is discharged to result in wasteful consumption of the  
10 ink.

Thus, there is left two other possible methods of removing bubbles, i.e., a method in which bubbles are directly discharged to the outside and a method in which bubbles are moved to an ink tank and kept in a part of the tank where  
15 they do not hinder the supply of ink. The former method involves a configuration in which a hole for communication to the outside is provided in an ink supply channel, and this method is not preferable for the reasons described below.

In most ordinary inkjet recording apparatus, in order  
20 to prevent undesirable leakage of ink through an ejection opening, a capillary force generating member such as an absorber is disposed in an ink tank or a negative pressure is generated in an ink containing space in an ink tank by providing an elastic member such as a spring in an flexible  
25 ink containing bag to exert an urging force in the direction of increasing the internal volume of the same. In such cases,

when a simple communication hole is provided in the supply channel to remove bubbles, since the negative pressure is canceled by invasion of air through the communication hole, it becomes necessary to dispose a pressure-regulating valve at the communication hole. This is not preferable because the structure of the ink supply system and consequently the structure of a recording apparatus utilizing the same become complicated and large-sized. Further, in order to prevent leakage of ink through the communication hole for removing bubbles, it is required to dispose a water repellent film which allows a gas to pass but disallows a liquid to pass or a device for opening the communication hole only when bubbles are contained to discharge the bubbles (a mechanism for detecting the quantity of bubbles or a mechanism for opening and closing the communication hole). This results in an increasing in the manufacturing cost and a complicated and large-sized structure.

The approach of moving bubbles into an ink tank will now be discussed. In doing so, it is preferable to be able to transport the ink to the head in a quantity equivalent to the volume of the bubbles or gas to be moved into the ink tank because this will keep the internal volume of the ink tank unchanged and keep a negative pressure generated therein constant to allow a negative pressure, which is in equilibrium with the ability of the recording head to hold meniscus formed at the ejection opening, to be applied to the recording head.

In the case of a cartridge type ink tank, since it is replaced with new one when the ink contained there is runs out, the ink tank can be regarded as having a configuration which allows a gas to be completely eliminated from the ink supply system.

5        In popular inkjet recording apparatus for consumers, however, a configuration is frequently employed in which cartridge type ink tanks containing a black ink and color inks, respectively, can be detachably mounted on a recording head or a carriage mounting the head from above the same.

10       Specifically, many of the cartridges are configured so that they are stuck by hollow ink supply needles mounted on the carriage with their points directed upward to allow the inks to be supplied to a recording head. Therefore, attention is to be paid on the inner diameter of the ink supply needles

15       that connect the ink cartridges and the recording head. Specifically, while it is desired to use thin supply needles to allow a cartridge mounting operation to be easily performed without requiring a great force, a reduction in the inner diameter of the needles disallows smooth movement of bubbles

20       because of a corresponding increase in meniscus force.

Several proposals have been made on the mechanism for moving a gas into an ink tank.

For example, in Japanese Patent Application Laid-open No. 5-96744(1993), a configuration is disclosed in which a

25       recording head is separated into a first chamber having an atmosphere communication hole and a second chamber having

a capillary force generating member and in which the first chamber and an ink tank are connected through two or more communication channels that open into the first chamber at different elevations to supply air into the ink tank through one of the communication channel. In such a configuration, since a negative pressure is exerted on a print head by a difference between water heads in the first and second chambers or the capillary force generating member provided in the second chamber, the atmosphere communication hole is provided at the first chamber.

However, the configuration of the aforementioned reference is aimed at introducing atmosphere into the ink tank in accordance with the supply of the ink in order to use up the ink in the ink tank that is not deformed and is not aimed at discharging bubbles contained in the ink supply channel into the ink tank. That is, the technique disclosed in this application cannot be used to transport a gas from the ink supply channel especially the second chamber or recording head to the ink tank.

As another proposal, Japanese Patent Application Laid-open No. 11-309876(1999) discloses a configuration in which a gas-preferring introduction channel and a liquid delivery channel are provided at a communication section for connecting a chamber for containing a negative pressure generating member and a liquid containing chamber that are separable from each other to ensure that a gas is introduced



into the liquid containing chamber. However, this application also discloses a configuration wherein a capillary force generating member and an atmosphere communication hole are provided between an ink tank and a recording head, the configuration represents an open type ink supply channel to and from which a gas freely enters and exits through an opening as the atmosphere communication hole as seen in Japanese Patent Application Laid-Open No. 5-96744 (1993). The technique discloses in the same application cannot be used to eliminate bubbles entrapped in an ink supply channel.

Further, U.S. Patent No. 6,347,863 discloses an ink container 50 formed with a drain conduit 66, 72 or 74 and a vent conduit 76, 82 or 84 that protrude from the bottom of the container and describes a configuration in which an upper opening of the drain conduit is located on the bottom of an inner wall of the container and in which an opening of the vent conduit is located in a containing space of the container. The technique disclosed in this document is aimed at configuring a system for refilling a member 14 having a reservoir 16, 18 or 20 with ink and is not aimed at removal of bubbles entrapped in an ink supply channel downstream of the reservoir or in a section that uses the ink. Since lower openings of the drain conduit and the vent conduit are at the same elevation, there is a possibility that movement of a liquid and gas is disabled when meniscuses are formed in

the conduits. Further, there is no description of an atmosphere communicating hole in this document, in a state that a system composed of ink container (50) and pressure plates (14) is closed, the inner negative pressure abruptly increases while a continuous use of ink, resulting in a disable supply of the ink to the ink-consuming section. In view of the aforementioned, it is considered the atmosphere communication hole is provided with any part of the system. Considering a disclosure that reservoir (16, 18, 20) is filled with foam (90), and a configuration and functions of the gas-preferring introduction channel, the ink container (50) shown in Fig. 2 of this document and the like, it is assumed that the atmosphere communication hole is placed at a side of the reservoir (16, 18, 20). In any case, there is no perspective that a positive elimination of bubbles remaining in the ink supplying channel is performed due to the above-mentioned 1) to 4).

Further, Japanese Patent Application Laid-open No. 10-29318(1998) discloses a configuration in which a replenishing tank for replenishing a reservoir tank with ink can be coupled to the tank that has a chamber containing a negative pressure generating member and an ink containing chamber and in which, when the replenishing tank is coupled to the ink containing section in an upper part and a lower part of the same, the ink is introduced into the ink containing chamber from the replenishing tank through a liquid

communication pipe associated with the lower part, and air is introduced into the replenishing tank from the ink containing chamber through a gas communication pipe associated with the upper part. However, the application is not essentially different from Japanese Patent Application Laid-open No. 5-96744(1993) and Japanese Patent Application Laid-open No. 11-309876(1999) in the configuration in which a negative pressure generating member and an atmosphere communication hole are provided between an ink containing chamber and a recording head. The technique discloses in the same application cannot be used to eliminate bubbles entrapped in an ink supply channel.

Japanese Patent Application Laid-open No. 2001-187459 discloses a configuration as shown in Fig. 23 in which a sub-tank 1022 for replenishing a main tank 1020 in communication with a recording head 1018 with ink is attached to an upper part of the main tank to introduce a gas in the main tank into the sub-tank and to supply the ink in the sub-tank into the main tank through acceleration and deceleration of a carriage. According to the application, the main tank section has means for introducing atmosphere although the main tank section in communication with the sub-tank contains the ink in a free state or directly, which configuration is not essentially different from those in Japanese Patent Application Laid-open Nos. 5-96744(1993), 11-309876(1999), and 10-29318(1998). That is, the proposal lacks the

viewpoint of positive elimination of bubbles entrapped in an ink supply channel due to the above (1) to (4).

The configurations in Japanese Patent Application Laid-open Nos. 5-96744(1993), 11-309876(1999),  
5 10-29318(1998), and 2001-187459 are similar in that a separable liquid containing section (ink tank) is in communication with a recording head through a plurality of communication channels and in that atmosphere introducing means is provided downstream of the communication channels  
10 (on the recording head side of the channels). Problems with this configuration will be described below with reference to Japanese Patent Application Laid-open No. 2001-187459 as a typical example.

Fig. 23 is a conceptual diagram for explaining the  
15 invention disclosed in the Japanese Patent Application Laid-open No. 2001-187459. A discussion will be made on balance among forces acting on the region of a meniscus formed in a pipe 1056A on an assumption that movement of air (movement of air into a sub ink chamber 1081 of a sub tank 1022 through  
20 the pipe 1056A) has stopped in the illustrated state. First, there are forces acting downward, i.e., a pressure  $H_A$  originating from a water head difference between the level of ink in the sub ink chamber 1081 and the position of the meniscus that is formed at an opening of the pipe 1056A and  
25 a pressure  $M_A$  originating from meniscus force. Further, there is a force acting upward, i.e., a pressure  $P$  originating

from air stored in an ink bag 1100 that is disposed in a main tank 1020. All of those forces or pressure have come to a balance to stop the movement of air. In this case, the pressure  $P$  of the air is balanced with a sum of the pressure originating from the water head difference between the level of the ink in the sub ink chamber 1081 and the position of the level of the ink in the ink bag 1100 and the pressure originating from the meniscus force ( $P = H_A + M_A$ ). Further, since the ink in the sub ink chamber 1081 and the ink in the ink bag 1100 are in communication with each other, a difference  $H_B - H_A$  between the downward ink pressure acting on the meniscus formed at the pipe 1056A and the pressure of the gas in the ink bag 1100 is equal to the pressure  $H_B - H_A$  originating from the water head difference between the position of the meniscus at the pipe 1056A and the level of the liquid in the ink bag 1100. The balance between the pressure originating from the water head difference  $H_B - H_A$  and meniscus pressure  $M_A$  has consequently brought about an equilibrium state.

When the level of the liquid in the ink bag 1100 is lowered from the state as a result of introduction of bubbles from a bubble generator 1104 by consumption of ink, the pressure  $H_A - H_A$  originating from the water head difference between the position of the meniscus at the pipe 1056A and the level of the liquid in the ink bag 1100 increases. When the pressure exceeds the meniscus pressure, air is introduced

into the sub ink tank 1081, and the ink in the sub ink chamber 1081 is supplied to the ink bag 1100 accordingly.

When the ink is ejected at a recording head 1018, however, since a flow of ink occurs throughout the supply system, a pressure loss in accordance with the ink flow rate or volume in the pipe 1056B occurs between the sub ink chamber 1081 and the ink bag 1100. This results in a need for taking the pressure loss into consideration in reviewing the above-described relationship between the meniscus pressure and the pressure originating from the water head difference between the meniscus position and the level of the liquid in the ink bag 1100. Consequently, movement of air occurs when the pressure originating from the water head difference between the meniscus position and the level of the liquid in the ink bag 1100 is greater than a pressure that is obtained by reflecting the pressure loss in the above-described meniscus pressure. That is, unlike the state in which movement of air has been stopped, no gas-liquid exchange occurs in an ink-ejecting state or a dynamic state unless the liquid level is further lowered in a quantity corresponding to the pressure loss at the pipe 1056B in accordance with the ink flow rate. When the liquid level at which the gas-liquid exchange to be started becomes lower than the opening of the pipe 1056B, no gas-liquid exchange occurs, and the ink in the main tank 1020 is used up with the ink in the sub tank 1022 left unused.

Therefore, when the pipe is made thin to facilitate the tank mounting operation as described above, the pressure loss increases accordingly, and attention must be paid on the fact that the liquid level at which gas-liquid exchange  
5 in the main tank is to be started becomes lower accordingly. That is, it becomes inevitable to increase the size of the main tank, which results in an increase in the size of the recording apparatus as a whole.

Another problem with the configuration as shown in Fig.  
10 23 is the fact that the bubble generator 1104 is disposed in a lower part of the ink tank. Specifically, while it is strongly desirable to minimize transportation of bubbles to the ink ejection opening, as an ink ejecting operation proceeds, bubbles introduced from the bubble generator 1104 can be  
15 entrained by the flow of ink toward the recording head 1018 to enter a flow channel 1041 in communication with the recording head 1018. Therefore, in order to prevent such entrainment of bubbles, it is necessary to take measures such as limiting the flow of ink accompanying the ink ejecting  
20 operation and disposing the bubble generator 1104 in a position apart from a filter section 1039, which results in a further increase in the size of the main tank 1020.

Those problems are similarly encountered in the configurations in Japanese Patent Application Laid-open Nos.  
25 5-96744(1993), 11-309876(1999), and 10-29318(1998) that are configurations including atmosphere introducing means

provided on the recording head side of the communication channel.

#### DISCLOSURE OF THE INVENTION

5           As described above, although the above-cited documents refer to introduction of a gas into an ink tank located at an upper end of a stream, none of them serves the purpose of transporting a gas entrapped in an ink supply channel that is a closed structure when used, i.e., a gas that enters and  
10 stays in the channel for the reasons described in the above (1) to (4), into an ink tank smoothly and keeping it in the tank.

          Therefore, in a liquid supply system having a structure that is closed relative to a liquid-using section, it is an  
15 object of the invention to make it possible to eliminate a gas that hinders an operation utilizing a liquid and an operation of supplying the liquid from the liquid-using section quickly and smoothly without making the structure complicated.

20           It is another object of the invention to provide an inkjet recording apparatus in which a gas entrapped in an ink supply channel having a closed structure is smoothly and quickly transported to an ink tank and in which problems attributable to entrapped bubbles, i.e., failures of  
25 recording attributable to a failure of ink supply and clogging of an ejection opening by entrapped bubbles, do not occur



when the recording apparatus is actually used.

In a first aspect of the present invention, there is provided a liquid supply system, comprising:

5        a liquid consuming section for consuming a liquid;  
      a liquid chamber communicating with the liquid consuming section;

      a liquid containing section for containing the liquid;  
and

10       plural communication channels for providing communication between the liquid chamber and the liquid containing section, wherein

      the liquid chamber forms a substantial closed space except the plural communication channels and the liquid  
15       consuming section, and

      the liquid containing section has means for adjusting a pressure inside the system.

In a second aspect of the present invention, there is  
20       provided a fluid communication structure for providing fluid communication between a liquid containing section for containing a liquid and a liquid consuming section for consuming the liquid, the fluid communication structure comprising:

25       a liquid chamber communicating with the liquid consuming section; and

plural communication channels for providing communication between the liquid chamber and the liquid containing section, wherein

the liquid chamber forms a substantial closed space  
5 except the plural communication channels and the liquid consuming section, and in a state where a gas exists inside the closed space, the gas can be transferred to the liquid containing section via a part of the plural communication channels.

10

In a third aspect of the present invention, there is provided an ink supply system, comprising:

a recording head for ejecting an ink;

a liquid chamber communicating with the recording head;

15 an ink tank for containing the ink; and

plural communication channels for providing communication between the liquid chamber and the ink tank, wherein

the liquid chamber forms a substantial closed space  
20 except the plural communication channels and the recording head, and

the ink tank has means for adjusting a pressure inside the system.

In a fourth aspect of the present invention, there is  
25 provided an ink supply system, comprising:

a recording head for ejecting an ink;

a liquid chamber communicating with the recording head;  
an ink tank for containing the ink; and  
plural communication channels for providing  
communication between the liquid chamber and the ink tank,  
5 wherein

the liquid chamber forms a substantial closed space  
except the plural communication channels and the recording  
head, and

on ejecting of the ink from the recording head,  
10 atmosphere is introduced into the ink tank with liquid chamber  
side opening portions of the plural communication channels  
being in contact with the ink.

In a fifth aspect of the present invention, there is  
provided an ink tank that is connected via plural communication  
15 channels to a liquid chamber communicating with a recording  
head for ejecting an ink and thereby comes into fluid  
communication with the liquid chamber, the liquid chamber  
forming a substantial closed space except the plural  
communication channels and the recording head, the ink tank  
20 comprising means for adjusting a pressure inside an ink supply  
system for supplying the ink to the recording head.

In a sixth aspect of the present invention, there is  
provided an inkjet recording head for ejecting an ink to  
thereby perform recording, the inkjet recording head having  
25 the fluid communication structure as described above integral  
therewith.

In a seventh aspect of the present invention, there is provided an inkjet recording apparatus, wherein an ink supply system as described above is used to perform recording as holding the ink supply system such that the liquid chamber is positioned substantially above the recording head and the ink tank is positioned substantially above the liquid chamber, in terms of their positions in use, with reference to a vertical direction.

In an eighth aspect of the present invention, there is provided an ink supply system, comprising:

- a recording head for ejecting an ink;
- a liquid chamber communicating with the recording head;
- an ink tank for containing the ink;
- plural communication channels for providing communication between the liquid chamber and the ink tank;
- and

means for introducing atmosphere directly into the ink tank without via the liquid chamber.

In a ninth aspect of the present invention, there is provided an ink tank that is connected via plural communication channels to a liquid chamber communicating with a recording head for ejecting an ink and thereby comes into fluid communication with the liquid chamber, the ink tank comprising:

- means for introducing atmosphere directly into the ink tank without via the liquid chamber; and

means for adjusting a pressure inside an ink supply system for supplying the ink to the recording head.

According to the invention, in the liquid supply system  
5 having the closed structure to a liquid-consuming section, a gas that hinders a liquid consuming operation and a liquid supply operation is rapidly and smoothly eliminated from the liquid-consuming section without involving any complication in structure.

10 Besides, when the invention is applied to the inkjet recording apparatus, a gas remaining in the ink supply channel having the closed structure is smoothly and rapidly transferred to the ink tank side. Moreover, even in actual use of the recording apparatus, it is possible to prevent  
15 a problem resulting from stagnant air bubbles, i.e., a recording defect resulting from poor ink supply, clogging of the ejection openings caused by mixed-in air bubbles, or the like.

Besides, when an ink including a pigment as a coloring  
20 material is used, the sedimentation of pigment particles is dispersed when air is transferred to the tank, thus enabling securement of ink storing stability and ejection reliability.

As aforesaid, according to the invention in which ink can be supplied with a negative pressure applied to the head  
25 being stabilized, printing performance and reliability and a reduction in cost can be simultaneously realized.

The above and other objects, effects, features and advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying drawings.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic sectional view of a liquid supply system according to a first embodiment of the invention;

Fig. 2 is a schematic sectional view showing a state  
10 in which a new ink tank has not yet been attached to a liquid chamber or a recording head, for explaining a gas removal process of the first embodiment;

Fig. 3 is a schematic sectional view showing an instantaneous state, following the state of Fig. 2, in which  
15 a new ink tank is attached, for explaining a gas removal process of the first embodiment;

Fig. 4 is a schematic sectional view showing a state in which ink is ejected from the recording head, for explaining a gas removal process of the first embodiment;

20 Fig. 5 is a schematic sectional view showing a state in which ink ejection or discharge of Fig. 4 is stopped, for explaining a gas removal process of the first embodiment;

Fig. 6 is a schematic sectional view showing a state, following the state of Fig. 5, in which ink movement and gas  
25 discharge simultaneously proceed, for explaining a gas removal process of the first embodiment;

Fig. 7 is a schematic sectional view showing a state in which the ink ejection and the gas discharge are stopped, for explaining a gas removal process of the first embodiment;

Fig. 8 is an explanatory view for explaining the principle of the ink movement and gas discharge of the first  
5 embodiment;

Fig. 9 is an explanatory view for explaining the principle of the ink movement and gas discharge of the first embodiment under different conditions from those of Fig. 8;

Fig. 10 is a schematic sectional view of a liquid chamber that is applied to a liquid supply system according to a second  
10 embodiment of the invention;

Fig. 11 is a schematic sectional view for explaining a configuration and an operation of the liquid supply system according to the second embodiment of the invention;  
15

Fig. 12 is a perspective view showing a main portion of a connecting section that is applied to an ink supply system applied to a third embodiment of the invention;

Figs. 13A and 13B are schematic sectional views for explaining a configuration and an operation of a liquid supply system according to a fourth embodiment of the invention;  
20

Figs. 14A and 14B are schematic sectional views for explaining a configuration and an operation of a liquid supply system according to a fifth embodiment of the invention;

Figs. 15A and 15B are schematic sectional views for explaining a configuration and an operation of a liquid supply  
25

system according to a sixth embodiment of the invention;

Figs. 16A and 16B are schematic sectional views for explaining a configuration and an operation of a liquid supply system according to a seventh embodiment of the invention;

5 Fig. 17 is an enlarged view of the connecting section for explaining an eighth embodiment of the invention;

Fig. 18A is an exploded perspective view showing a specific configuration example of an ink tank to which the first embodiment of the invention is applied; Fig. 18B is  
10 a transverse sectional view of an ink containing chamber portion of the ink tank;

Figs. 19A and 19B are sectional views showing a specific configuration example of an ink supply system to which the configuration of the first embodiment of the invention is  
15 applied;

Figs. 20A and 20B are sectional views showing a modified example of the configuration of Figs. 19A and 19B;

Fig. 21 is a perspective view showing a configuration example of an inkjet recording apparatus to which the invention  
20 is applicable;

Fig. 22 is a sectional view for explaining an ink supply system according to still another embodiment of the invention;  
and

Fig. 23 is a sectional view for explaining a conventional  
25 example of an ink supply system.



## BEST MODE FOR CARRYING OUT THE INVENTION

Several embodiments of the invention in an inkjet recording apparatus will now be described with reference to the drawings.

5        In the present specification, the term "recording" implies not only forming meaningful information such as characters and graphics but also forming, on recording media, images, figures, and patterns in a broad sense regardless of whether or not they are meaningful and whether or not they  
10    are manifested to be visually perceivable to a man or processing the recording media to form them.

While the term "recording media" implies not only paper that is used recording apparatus in general but also a variety of objects that can accept inks such as cloth, plastic films,  
15    metal sheets, glass, ceramics, wood, and leathers, the term "paper" will be used in the following.

While the following embodiments will be described on an assumption that ink is used as a liquid in a liquid supply system according to the invention by way of example, it is  
20    obvious that usable liquids are not limited to inks and include liquids for processing recording media in the field of inkjet recording, for example.

## (First Embodiment)

Fig. 1 is a schematic sectional view of a liquid supply  
25    system according to a first embodiment of the invention.

Briefly, the ink supply system of the embodiment shown

in Fig. 1 comprises an ink tank 10 as a liquid container, an inkjet recording head (hereinafter simply referred to as "recording head") 20, and a liquid chamber 50 that forms an ink supply channel for communication between them. The liquid chamber 50 may be separably or inseparably integrated with the recording head 20. The liquid chamber 50 may be provided on a carriage that carries the recording head 20 such that the ink tank 10 can be attached and detached to and from the same from above and may close the ink supply channel extending from the ink tank 10 to the recording head 20 when it is mounted. The liquid chamber 50 forms a substantially closed space except for portions to connect the ink tank 10 and the recording head 20 and does not have means for introducing atmosphere.

Schematically, the ink tank 10 comprises two chambers, i.e., an ink containing chamber 12 in which an ink containing space is defined and a valve chamber 30. The interiors of those chambers are in communication with each other through a communication channel 13. Ink to be ejected from the recording head is contained in the ink containing chamber 12 and is supplied to the recording head as an ejecting operation proceeds.

A flexible film (sheet member) 11 that can be deformed is disposed in a part of the ink containing chamber 12, and a space for containing the ink is defined between the part and an inflexible outer casing 15. The space outside the ink

containing space as viewed from the sheet member 11, i.e., the space above the sheet member 11 in the figure is open to the atmosphere and is therefore under the same pressure as the atmospheric pressure. Further, the ink containing  
5 space is a substantially closed space except for a portion to connect a connecting section 51 of the liquid chamber 50 provided under the same and the communication channel 13 to the valve chamber.

The shape of a central portion of the sheet member 11  
10 of the present embodiment is regulated by a pressure plate 14 that is a support member in the form of a flat plate, and peripheral portions of the same are deformable. The sheet member 11 is formed in a convex shape in the central portion thereof in advance, and the side geometry of the same is  
15 substantially trapezoidal. As will be described later, the sheet member 11 is deformed in accordance with changes in the amount of ink in the ink containing space and changes in the pressure in the chamber. On such occasions, the peripheral portions of the sheet member 11 undergo  
20 well-balanced expansion and contraction, and the central portion of the sheet member 11 undergoes upward and downward translation in the figure while being kept in a substantially horizontal attitude. Since the sheet member 11 is smoothly deformed (moved) as thus described, no shock occurs in  
25 association with the deformation, and no abnormal pressure change attributable to shock occurs in the ink containing

space.

In the ink containing space, there is provided a spring member 40 in the form of a compression spring which exerts an urging force to urge the sheet member 11 upward in the figure through the pressure plate 14 and which thereby generates a negative pressure relative to an atmosphere pressure in such a range that the recording head can perform an ink ejecting operation in equilibrium with a force to hold meniscuses formed at an ink ejecting section of the recording head. In addition, any change in the volume of air in the ink containing chamber as a result of a change in the environment (ambient temperature or atmospheric pressure) is accommodated by displacement of the spring and the sheet, so that the negative pressure in the chamber will not change significantly. While Fig. 1 shows a state in which the ink containing space is substantially completely filled with ink, the spring member 40 is compressed even in this state to generate a proper negative pressure in the ink containing space.

In the valve chamber 30, a one-way valve is provided for introducing a gas (air) from the outside when the negative pressure in the ink tank 10 increases to a predetermined value or higher and preventing leakage of the ink from the ink tank 10. The one-way valve comprises a pressure plate 34 which has a communication hole 36 and serves as a valve closing member, a seal member 37 which is secured to an inner wall

of the valve chamber housing in a position opposite to the communication hole 36 and which is capable of sealing the communication hole 36, and a sheet member 31 which is bonded with the pressure plate and through which the communication  
5 hole 36 extends. Thus, a substantially closed space is maintained also in the valve chamber 30 except for the communication hole 13 to the ink tank 10 and the atmosphere communication hole 36. The space in the valve chamber housing located on the right side of the sheet member 31 in the figure  
10 is open to the atmosphere through an atmosphere communication hole 32 and is therefore under the same pressure as the atmospheric pressure.

Peripheral portions of the sheet member 31 other than the portion bonded with the pressure plate 34 in the central  
15 portion thereof are deformable. The member has a convex shape in the central portion thereof and has a side geometry that is substantially trapezoidal. By employing such a configuration, the pressure plate 34 that is a valve closing member is smoothly moved to the left and right in the figure.

20 In the valve chamber 30, there is provided a spring member 35 as a valve regulating member for regulating a valve opening operation. The spring member 35 is also in a compressed state, and a configuration is employed in which a reaction force against the compression urges the pressure  
25 plate 34 to the right in the figure. As a result of the expansion and compression of the spring member 35, the seal

member 37 seals and leaves the communication hole 36 to function as a valve, and it also acts as a one-way valve mechanism that allows only introduction of a gas from the atmosphere communication hole 32 into the valve chamber 30  
5 through the communication hole 36.

What is required for the seal member 37 is to ensure that the communication hole 36 is sealed. Specifically, any member capable of maintaining a sealed state may be employed including those configured such that at least a part of the  
10 same in contact with the communication hole 36 is kept flat relative to the opening, those having a rib that can be put in contact with the area surrounding the communication hole 36, and those configured such that an end of the same can be stuck into the communication hole 36 to close the  
15 communication hole 36. There is no particular limitation on the material for the member. However, since the sealing is achieved by the expanding force of the spring member 35, the seal member is more preferably formed of an element that easily follows the sheet member 31 and the pressure plate  
20 34 that are moved by the expanding force acting thereon, i.e., a contractible elastic element such as rubber.

When the ink tank 10 is configured as described above, each part of the same is designed such that the communication hole 36 is opened to cause an inflow of the atmosphere into  
25 the ink containing chamber at the instant when ink consumption further continues to increase the negative pressure in the

ink containing chamber 12 from an equilibrium state between the negative pressure and the force exerted by the valve regulating member in the valve chamber 30 which has been reached by the progress of ink consumption since an initial state in which the tank was sufficiently filled with the ink. Since the introduction of the atmosphere allows the internal volume of the ink containing chamber 10 to increase conversely because the sheet member 11 or the pressure plate 14 can be displaced upward in the figure, and the negative pressure simultaneously decreases to close the communication hole 36.

Even when there is a change in the environment of the ink tank, e.g., a temperature rise or a pressure reduction, since the air that has been introduced into the containing space is allowed to expand in a quantity equivalent to the volume of the tank between a position of the sheet member 11 or the pressure plate 14 reached by its maximum downward displacement and an initial position of the same, i.e., since a space corresponding to the volume functions as a buffer area, a pressure increase attributable to the change in the environment can be moderated to prevent leakage of the ink from the ejection opening effectively.

Since no outside air is introduced until the buffer area is provided through a reduction of the internal volume of the ink containing space as a result of delivery of the liquid from the initial charged state, no leakage of the ink hard to occur even if there is an abrupt change in the

environment or even if the ink tank or apparatus is vibrated or dropped until that time. Further, the buffer area is not provided in advance in a state in which no ink has been used, the ink container can be provided with high volumetric  
5 efficiency and a compact configuration.

While the spring 40 in the ink containing chamber 12 and the spring 35 in the valve chamber 30 are schematically shown in the form of coil springs in the illustrated example, other types of springs may obviously be used. In particular,  
10 conical springs or plate springs may be used, for example. When plate springs are used, they may be provided by combining a pair of plate spring members having a substantially U-shaped sectional configuration such that open ends of the U-like shapes are associated with each other.

15 In the illustrated embodiment, the recording head 20 and the ink tank 10 are coupled by inserting the connecting section 51 of the liquid chamber 50 provided integrally with the recording head into the ink tank 10. That is, in the present embodiment, the liquid chamber having the connecting  
20 section 51 forms a fluid communicating structure and establishes fluidic coupling between them to allow the ink to be supplied to the recording head 20. A sealing member 17 such as rubber is attached to an opening of the ink tank into which the connecting section 51 is inserted to seal the  
25 circumference of the connecting section 51, thereby preventing leakage of the ink from the ink tank 10 and ensuring



the connection between the connecting section 51 and the ink tank 10. Slits or the like may be formed on the sealing member 17 in the inserted position of the same to facilitate the insertion of the connecting section 51. When the connecting section 51 is not inserted, the slits are closed by an elastic force of the sealing member 17 itself to prevent leakage of the ink.

The connecting portion 51 is a member, in the form of a hollow needle, the interior of which is divided into two parts in the axial direction of the portion. A configuration is employed in which the positions of openings located at the tops of the respective hollow sections, i.e., located inside the ink containing chamber 12 (hereinafter referred to as "tank side opening positions") are at substantially the same elevation in the vertical direction and in which the positions of openings located at the bottoms of the respective hollow sections, i.e., located inside the liquid chamber connected to the head (hereinafter referred to as "head side opening positions") are at different elevations. Hereinafter, for convenience, the flow channel whose head side opening position in the liquid chamber 50 is relatively lower in the vertical direction (the right flow channel in the figure) is referred to as "ink flow channel 53", and the flow channel whose head side opening position is higher in the vertical direction (the left flow channel in the figure) is referred to as "air flow channel 54". However, the

designation is based on the fact that the ink is delivered to the recording head primarily through the ink flow channel 53 and air is transported to the ink tank through the air flow channel 54 in a bubble eliminating process, and both  
5 of the ink and air may move in each flow channel in practice as will be described later. That is, the names of the flow channels do not mean that they are to be exclusively used for the respective fluids.

The ink supply channel in the liquid chamber 50 has  
10 a section which gradually increases from its size on the side of the portion connected to the ink tank 10 (upstream) and which gradually decreases toward the recording head 20 (downstream). The filter 23 is provided at the portion where the ink supply channel is enlarged to the maximum to prevent  
15 impurities included in the supplied ink from flowing into the recording head 20. A gas-liquid interface in the liquid chamber 50 formed by a gas staying therein is greater than the sectional areas of the flow channels 53 and 54 in the horizontal direction. As a result, when a water head  
20 difference of the ink in the ink tank 10 acts on the ink in the liquid chamber 50 through the flow channel 53, the pressure of the gas existing in the liquid chamber 50 is increased to allow the gas to be discharged toward the ink tank 10 through the air flow channel 54. This effect is made more significant  
25 by the configuration in which the ink supply channel in the liquid chamber 50 gradually expands from its size on the side

of the portion connected to the ink tank 10 (upstream), i.e., the channel has an upwardly diminishing taper, to make bubbles apt to gather around the head side opening position of the air flow channel 54.

5       The recording head 20 is provided with a plurality of ejection openings arranged in a predetermined direction (for example, a direction different from the moving direction of the recording head when the serial recording method is employed in which the head is mounted on a member such as a carriage  
10 to perform an ejecting operation while moving relative to a recording medium as described later), a liquid path in communication with each of the ejection openings, and elements provided in the liquid paths for generating energy used for ejecting ink. There is no particular limitation on the method  
15 of ejecting ink from the recording head or the type of the energy generating elements. For example, electrothermal transducers that generate heat in response to energization may be used as such elements to utilize thermal energy generated by them for ejecting the ink. In this case, film  
20 boiling is caused at the ink by the heat generated by the electrothermal transducer, and the ink can be ejected from the ink ejection openings using the foaming energy. Alternatively, electromechanical transducers such as piezoelectric elements which are deformed in response to the  
25 application of a voltage may be used to utilize their mechanical energy for ejection of the ink.

The recording head 20 and the liquid chamber 50 may be separably or inseparably integrated, and they may alternatively be configured as separate bodies that are connected through a communication channel. When they are  
5 integrated, they may be in the form of a cartridge that can be attached and detached to and from a member (e.g., a carriage) provided in the recording apparatus.

A process of removing bubbles or gas into the ink tank of the present embodiment having the above-described  
10 configuration will be described with reference to Figs. 2 to 7.

Fig. 2 shows a state in which a new ink tank 10 has not been attached to the liquid chamber 50 or the recording head 20 yet. The ink tank 10 is completely charged with ink  
15 I, in which state a negative pressure is generated in the same by the spring member 40 and the sheet member 11 bulges toward the outside of the ink tank. Referring to the state of the recording head 20, since recording has been performed using the ink left in the liquid chamber 50 after the ink  
20 tank 10 mounted therein ran out, air has entered from the ink tank and has accumulated in an upper part of a region of the liquid chamber 50 located upstream of the filter 23.

In this state, since the upper openings of the connecting section 51 are open to the atmosphere, the ink can leak out  
25 from an ink ejection opening nozzle section of the recording head 20 for ejecting the ink when a pressure originating from

a water head difference between the ink level in the liquid chamber 50 and that in the nozzle section is greater than a meniscus holding force of the nozzle section. The leakage of the ink is prevented by employing such a design that the pressure originating from the water head difference will not exceed the meniscus holding force. Referring to a specific example of a design to prevent leakage of the ink from the nozzle section regardless of the amount of the residual ink in the liquid chamber 50 or the elevation of the ink level, a design may be employed in which the distance in the vertical direction between the upper openings of the connecting section 51 and the nozzles is determined such that the pressure originating from the water head difference when the ink is filled between the upper openings and the nozzles does not exceed a holding force of the ink menisci formed at the nozzle section. According to the invention, since the liquid chamber 50 is not configured to introduce air therein as will be described below, the liquid chamber 50 is provided with a compact configuration, and designing may therefore be carried out with increased freedom to prevent leakage of the ink effectively and simply.

Fig. 3 shows a state that immediately follows the mounting of a new ink tank 10 carried out in the state shown in Fig. 2. Before the ink tank is mounted, since the recording head 20 or the liquid chamber 50 is open to the atmosphere, the pressure of the gas in the region upstream of the filter

23 is equal to the atmospheric pressure. On the contrary, the interior of the ink tank is at a pressure (negative pressure) lower than the atmospheric pressure because of the spring member 40. As a result, a part of the gas in the region upstream of the filter 23 moves into the ink containing chamber 12 at the instant when the ink tank 10 is mounted, and the gas resides in an upper part of the tank to equalize the pressures in the ink containing chamber 12 and the liquid chamber 50. However, the ink forms a meniscus in each of the ink flow channel 53 and the air flow channel 54 of the connecting section 51, and the meniscus stop the movement of the gas when the pressures are balanced. While the removal of the gas may be completed depending on the volume of the gas in the liquid chamber, the gas in the illustrated case has a great volume, i.e., the gas to be removed still remains.

Fig. 4 schematically shows ejection of the ink from the recording head 20 in the form of droplets, for example. When the ink is ejected, the negative pressure in the recording head 20 or the liquid chamber 50 increases to break the meniscuses formed at the connecting section 51, which results in a movement of the ink from the ink tank 10 toward the liquid chamber 50. Accordingly, the internal volume of the ink containing chamber 12 decreases, and the sheet member 11 is deformed downward while being limited by the pressure plate 14. The spring member 40 is thus compressed to increase the negative pressure in the ink containing chamber 12.

In the present embodiment, the diameters of the ink flow channel 53 and the air flow channel 54 are substantially equal to each other, and the ink is supplied from each of the flow channels because there is not such a large difference in pressure losses between the flow channels relative to the negative pressure in the recording head 20 or the liquid chamber 50. In the illustrated state wherein a head side opening 53h of the ink flow channel 53 is in contact with the ink, the ink flows through the ink flow channel 53 as it is, and bubbles generated in the liquid chamber 50 or the recording head 20 move into the region upstream of the filter and stay in the same region, i.e., the upper part of the liquid chamber 50 along with the gas that has already resided therein. In this state, while the ink forms a meniscus at the position of a head side opening 54h of the air flow channel 54, the ink will drop if the negative pressure in the recording head 20 or the liquid chamber 50 is high. While the connecting section 51 is filled with the ink as a result of the ejection of the ink associated with a recording operation or the ejection of the ink performed by an operation other than the recording operation (preliminary ejection) in the present embodiment, the same state can be realized by discharging the ink from the ejection openings using a suction pump with the ejection opening forming surface of the recording head 20 sealed with a capping member.

Fig. 5 shows a state in which the ejection of the ink

or the suction of the ink from the ejection opening forming surface has stopped. In this state, a water head difference generates a force that causes the ink in the ink flow channel 53 to move into the liquid chamber 50 and a force that discharges air in the air flow channel 54 into the ink tank 10. A theoretical description of this state will be given later.

Fig. 6 shows a state in which the movement of the ink into the liquid chamber 50 and the discharge of air into the ink tank 10 simultaneously proceed because of those forces.

Fig. 7 shows a state in which the gas-liquid interface in the region upstream of the filter has risen to the position of the head side opening 54h of the air flow channel 54, and the movement of the ink and the discharge of air stop.

Balance between pressures of respective portions in the state shown in Fig. 5 will be described with reference to Fig. 8. While Fig. 5 shows a state in which the ink is moved and air is discharged, Fig. 8 is based on an assumption that the movement and the discharge have not occur yet for the purpose of description.

The pressure of the gas residing in the region upstream of the filter will now be discussed. Let us assume that the pressure of bubbles in the ink containing chamber 12 is represented by  $P$  and that the pressure originating from the water head difference between the ink interface in the ink containing chamber 12 and the ink interface in the region upstream of the filter is represented by  $H_s$ . Then, the



pressure of the gas in the region upstream of the filter is greater than the pressure of the gas in the ink containing chamber 12 by the pressure  $H_s$ , i.e., it is represented by  $P + H_s$ . The pressure increase is attributable to the fact  
5 that the liquid chamber 50 or the recording head 20 is a closed structure and will not occur in a configuration in which there is an atmosphere communication hole between the ink tank and the recording head as seen in the related art as described above (e.g., Japanese Patent Application Laid-open No.  
10 5-96744(1993)).

Let us now discuss the balance of pressures in the position of the meniscus at the head side opening 54h of the air flow channel 54. Since it is assumed that a pressure  $P + H_a$  acting downward is balanced against a pressure acting  
15 upward that is the above-described gas pressure  $P + H_s$ , the difference between the upward and downward pressures is balanced against a pressure  $M_a$  originating from meniscus that is expressed by the following expression.

$$M_a = 2\gamma \cos \theta_a / R_a \quad \dots \text{Equation 1}$$

20 Where  $\gamma$  represents the surface tension of the ink;  $\theta_a$  represents the angle at which the ink contacts the air flow channel 54; and  $R_a$  represents the diameter (inner diameter) of the air flow channel 54.

Therefore, the balance of the pressures in the position  
25 of the head side opening 54h of the air flow channel 54 is expressed by the following expressions.

$$P + H_s - (P + H_a) = M_a \quad \dots \text{Equation 2}$$

$$H_s - H_a = M_a \quad \dots \text{Equation 3}$$

The expressions indicate a state in which the pressure originating from the water head difference between the position of the meniscus in the air flow channel 54 and the ink interface in the region upstream of the filter is balanced against the pressure originating from the meniscus in the air flow channel.

Let us assume that the volume of the residual gas in the region upstream of the filter increases to satisfy:

$$H_s - H_a > M_a \quad \dots \text{Equation 4}$$

Then, since the pressure of the gas in the region upstream of the filter is higher, the meniscus in the air flow channel 54 begin to move toward the ink containing chamber 12, which results in a movement of air toward the ink containing chamber 12. Accordingly, the ink in the ink containing chamber 12 moves into the liquid chamber 50 through the ink flow channel 53, and the ink level in the liquid chamber is also raised.

Since the volumetric capacity of the air flow channel is much smaller than that of the liquid chamber, the rise of the ink level in the liquid chamber 50 having a relatively large volumetric capacity is not so great at the initial stage of the movement of air. On the contrary, the position of meniscus in the air flow channel 54 quickly moves to the position of an ink tank side opening 54t of the channel. Therefore, a pressure ( $H_s - H_a$ ) originating from a water head

difference between the position of the ink tank side opening  
54t of the air flow channel 54 and the position of the ink  
interface in the region upstream of the filter becomes  
considerably greater than the pressure originating from the  
5 meniscus on the air flow channel, which promotes the  
elimination of the air.

While the introduction of air into the ink tank is in  
progress, the position of the meniscus in the air flow channel  
54 is the position of the tank side opening 54t of the air  
10 flow channel 54. Let us assume that  $H_a'$  represents a pressure  
originating from a water head difference in the position of  
the tank side opening. Then, the air moves as long as the  
following relationship is true.

$$H_s - H_a' > M_a' \quad \dots \text{Equation 5}$$

15 where  $M_a'$  represents the pressure of the meniscuses formed  
in the position of the tank side opening of the air flow channel.  
The movement of the air stops when the following relationship  
becomes true before the ink interface in the region upstream  
of the filter reaches the position of the head side opening  
20 54h of the air flow channel.

$$H_s - H_a' < M_a' \quad \dots \text{Equation 6}$$

However, when the ink interface in the region upstream  
of the filter reaches the position of the head side opening  
54h of the air flow channel with the relationship expressed  
25 by Equation 5 kept unchanged, the pressure of the meniscus  
formed at the head side opening 54h of the air flow channel

will be also involved in the pressure balance. Thus, the movement of the air stops when the following relationship becomes true.

$$La < Ma + Ma' \quad \dots \text{Equation 7}$$

5 where  $La$  represents a pressure originating from a water head difference corresponding to the length of the air flow channel).

However, the movement of the air does not stop, and the ink interface further rises in the air flow channel when:

10  $La > Ma + Ma' \quad \dots \text{Equation 8}$

When the ink interface moves in the air flow channel, the air moves as long as the following relational expression is true.

$$Hs' - Ha' > Ma' + Ms' \quad \dots \text{Equation 9}$$

15 where  $Hs'$  represents a pressure originating from a water head difference between the ink interface in the air flow channel and the ink interface in the tank, and  $Ms'$  represents a dynamic meniscus pressure that is generated at the ink interface in the air flow channel. Since the ink contacts the flow channel  
20 at different angles in a dynamic state and a static state, the pressure  $Ma$  that is considered when the movement of the air begins and the dynamic pressure  $Ms'$  have different values for the same pipe diameter, and  $Ma$  is greater than  $Ms'$ .

While the above discussion has addressed a case wherein  
25 the head side opening 53h of the ink flow channel 53 is in contact with the ink as shown in Fig. 2, a discussion will

now be made on a state in which the head side opening 53h of the ink flow channel 53 is also not in contact with the ink in the liquid chamber 50 as shown in Fig. 9 as a result of further progress of ink consumption.

5 In Figs. 2 to 7 and Fig. 8, since the head side opening of the ink flow channel 53 is in contact with the ink, consideration is needed only on the balance of pressures in the position of meniscus in the air flow channel. In the state shown in Fig. 9, however, consideration must be also  
10 paid on meniscus formed in the ink flow channel 53.

Let us assume that the state shown in Fig. 9 is kept unchanged. Then, the balance of pressures in the positions of meniscus in each of the air flow channel 54 and the ink flow channel 53 in this state is expressed by the following  
15 expressions where  $P'$  represents a pressure of a gas residing in the liquid chamber 50 and  $M_i$  represents a pressure originating from meniscus formed in the ink flow channel 53.

$$P' - (P + H_a) = M_a \text{ and } P' - (P + H_i) = M_i$$

... Equations 10

20 Thus, no exchange of the fluids occurs in the ink tank and liquid chamber. Therefore, the following expressions need to be true in order that the air is eliminated and the ink is moved.

$$P' - (P + H_a) > M_a \text{ and } P' - (P + H_i) < M_i$$

25 They can be changed to:

$$P' - P > H_a + M_a \text{ and } P' - P < H_i + M_i$$

Therefore:

$$H_i + M_i > H_a + M_a$$

$$H_i - H_a = H > M_a - M_i \quad \dots \text{Equation 11}$$

Thus, the movement of the ink and the elimination of  
5 the air are determined whether they take place or not depending  
on the relationship between a pressure difference  $H$  in terms  
of a water head corresponding to the difference in the vertical  
direction between the positions of the head side openings  
53h and 54h of the ink flow channel 53 and the air flow channel  
10 54, respectively, and a difference between the pressures  
originating from the menisci in the air flow channel 54  
and the ink flow channel 54. Therefore, what is preferred  
is to adjust the negative pressure in the liquid chamber  
appropriately, for example, by ejecting the ink or sucking  
15 the ink from the ejection opening forming surface or the like.

While the air flow channel 54 and the ink flow channel  
53 have been described above as independent communication  
channels that are completely separate from each other, those  
flow channels may be in communication with each other through  
20 a microscopic communication channel in practice. The reason  
is that advantages expected from such an arrangement can be  
achieved without hindering the above-described operation of  
eliminating air provided that the force of menisci formed  
in the microscopic communication channel is at a level that  
25 has substantially no influence in comparison to the force  
of menisci formed at the flow channel openings, pressures

originating from a water head difference between liquid levels, and a negative pressure in the ink tank as discussed above. This also applies to other embodiments of the invention to be described later.

5           As seen in the above-described embodiment, one of major features of the invention is that means for introducing air into a liquid supply system is disposed only in an ink tank. That is, since no air is directly introduced into the liquid chamber 50, the above-described air eliminating operation  
10 is substantially completed only at the time of the replacement of an ink tank, and there is substantially no need for considering the same operation during normal use of ink (during an ink ejecting operation of the recording head). On the contrary, according to Japanese Patent Application Laid-Open  
15 No. 2001-187459, since air is introduced into a liquid chamber (a main tank in this document) while ink is used, a strict consideration must be paid on requirements to be met to allow gas-liquid exchange also during use of ink.

Specifically, since a liquid level at which gas-liquid  
20 exchange can take place is lowered during use of ink as described above, there is a limit ink flow volume at which gas-liquid exchange stops because an ink flow channel length  $H$  is limited and a state as shown in Fig. 9 is eventually reached after increases in the flow volume (the amount of  
25 supplied ink), although gas-liquid exchange can take place as shown in Fig. 8 in a static state.

On the contrary, in the present embodiment, since air introducing means is provided at the ink tank 10, there is no reduction of the liquid level in the liquid chamber (no accumulation of air) caused of introduction of air when ink is used. Since it is therefore possible not only to design the liquid chamber with a small size but also to supply ink through the air flow channel in addition to the ink flow channel during use of ink, influence of pressure loss at the connecting section can be reduced, which makes it possible to use a thin connecting pipe as the connecting section. As a result, the ink supply system can be made compact as a whole.

Even in the present configuration, when ink consumption continues after the ink in an ink tank 10 is completely used up, the ink level may go down into the liquid chamber to cause the air introduction means (valve chamber 30) to introduce air into the liquid chamber 50 through the ink containing chamber 12. In this case, however, since the ink in the ink tank 10 and the connecting section 51 has already run out, no pressure loss occurs in those regions. Thus, no limit is put on the ink flow volume even when such a situation is taken into consideration.

In the present embodiment, the interior of the connecting section 51 is divided into two parts to provide two flow channels, and the flow channels are made different from each other in the elevation of the positions of their head side openings. This makes it possible to transport a



gas residing in the region upstream of the filter to the ink tank quickly without a need for a complicated configuration.

Further, a gas residing in the liquid chamber can be quickly and smoothly transported to the ink tank to eliminate  
5 it from the supply channel by ejecting a small amount of ink or sucking ink from the side of the ejection opening forming surface after an ink tank replacing operation. Therefore, the ink will not be wasted in a large amount as experienced in eliminating a gas by performing the suction operation  
10 through the ejection openings.

When the negative pressure in the ink containing chamber is increased to a predetermined value or higher in the process of supplying ink from the ink tank, the valve chamber operates to take a gas from the outside into the ink containing chamber  
15 as described above.

In the case that an ink including a pigment as a coloring material is used, sedimentation of pigment particles can be distributed when air is transported to the tank to maintain the preservation stability of the ink and the reliability  
20 of ejection.

#### (Second Embodiment)

A liquid supply system according to a second embodiment of the invention will now be described with reference to Figs. 10 and 11. Parts that can be similarly configured between  
25 the present and the first embodiments are indicated by like reference numerals in respective positions.

Fig. 10 is a schematic sectional view of a liquid chamber 60 that is integral with a recording head 20. As illustrated, the interior of a connecting section 61 of the present embodiment is divided into two parts to provide two flow channels just as in the first embodiment except that there is substantially no difference in elevation between the position of a head side opening 63h of an ink flow channel 63 and the position of a head side opening 64h of an air flow channel 64. However, while the head side opening 64h of the air flow channel 64 fully opens into the space in the liquid chamber 60, a part of the head side opening 63h of the ink flow channel 63 is contiguous with an inner wall of the liquid chamber 60.

Fig. 11 shows an ink tank 10 attached to such a liquid chamber, and a phenomenon that occurs in such a case will be described below.

When ink meniscus exist in the ink flow channel 63 to keep the balance of pressures in the attached state, air is not eliminated as apparent from the above description with reference to Equations 10. However, when the negative pressure in the liquid chamber increases as a result of ejection of ink or suction of ink from the side of the ejection opening forming surface to lower the position of the meniscus in the ink flow channel 63 to the position of the head side opening 63h, a capillary force causes the ink to flow down along the inner wall of the liquid chamber because a part

of the opening 63h is contiguous with the inner wall, which disallows meniscus to be formed at the opening 63h. Then, the pressure of the gas in the region upstream of the filter increases because of the volume of the ink that has moved  
5 into the head flow channel, and meniscus in the air flow channel 64 is broken to allow air to be discharged into the ink tank 10.

In the configuration of the present embodiment, the movement of the ink and the discharge of air take place even  
10 when there is no difference between the positions of the elevations of the head side openings of the ink flow channel and the air flow channel, which consequently makes it possible to reduce the length of the connecting section 61. Thus, the liquid chamber of the recording head integral with the  
15 same can be made further compact compared to the first embodiment.

It is desirable to choose an appropriate configuration, material, surface condition of the inner wall or the like in accordance with the physical properties of the ink to be  
20 used.

(Third Embodiment)

Fig. 12 is a detailed view of a head side opening of a connecting section used in a third embodiment of the invention which employs a configuration of a liquid chamber  
25 that is generally similar to the configuration in the second embodiment. Specifically, while the interior of a connecting

section 71 of the present embodiment is also divided into two parts to provide two flow channels, there is substantially no difference in elevation between the position of a head side opening 73h of an ink flow channel 73 and the position  
5 of a head side opening 74h of an air flow channel 74. However, a portion 75 formed with fine grooves is provided along the ink flow channel, and the portion 75 extends from the head side opening 73h into the liquid chamber.

In this configuration, ink enters the fine grooves  
10 because of a capillary force of the ink, which prevents formation of meniscus that exert a high pressure at the head side opening of the ink flow channel 73. This facilitates a flow of ink from the ink flow channel. That is, the present embodiment is advantageous similarly to the second embodiment  
15 in that the movement of ink and the elimination of air take place even when there is no difference in elevation between the positions of head side openings of the ink flow channel and the air flow channel.

The configuration for preventing formation of meniscus  
20 that exert a high pressure at the head side opening of the ink flow channel is not limited by the second and third embodiments. For example, the same effect can be expected by enlarging the end section of the head side opening, providing the flow channels with different diameters, or  
25 providing the flow channels with inner surfaces in different conditions (e.g., angles of contact with ink) through

appropriate selection of materials and surface treatments,  
for example.

(Fourth Embodiment)

Figs. 13A and 13B are views for explaining a  
5 configuration and an operation of a liquid chamber according  
to a fourth embodiment of the invention.

The interior of a connecting section of a liquid chamber  
80 of the present embodiment is also divided into two parts  
to provide an ink flow channel 83 and an air flow channel  
10 84 just as in the first embodiment, but a configuration is  
employed in which a position of a head side opening of the  
ink flow channel 83 is located below the plane of a filter.

Therefore, when a sufficient amount of ink exists in  
the region upstream of the filter, the ink flows as indicated  
15 by the arrow in Fig. 13A to be supplied to a recording head  
20.

Fig. 13B shows a state in which ink consumption proceeded  
after the ink tank (not shown) is exhausted. As apparent  
from the figure, since a head side opening 83h of the ink  
20 flow channel 83 is located below the plane of the filter 23  
in the vertical direction, the ink in the vicinity of the  
head side opening 83h remains unused, and the head side opening  
83h of the ink flow channel 83 is therefore always in contact  
with the ink.

25 In such a configuration, therefore, air is always  
eliminated as long as the relationship represented by Equation

4 is satisfied, and there is no need for controlling the negative pressure in the liquid chamber in consideration to the relationship represented by Equation 11. It is also possible to reduce an ink flow channel length required for  
5 always keeping the head side opening of the ink flow channel in contact with the ink for the purpose of preventing formation of meniscus.

(Fifth Embodiment)

Figs. 14A and 14B are views for explaining a  
10 configuration and an operation of an ink supply system according to a fifth embodiment of the invention.

While the above-described embodiments have a configuration in which a valve chamber for introducing air is disposed in an ink tank to introduce air into the ink tank  
15 from the valve chamber as ink is supplied, an ink tank 10' in the present embodiment is not provided with a valve chamber for introducing air from the outside and is substantially comprised of only an ink containing chamber, as shown in Fig. 14A. A liquid chamber 50 and a recording head 20 have  
20 configurations similar to those in the first embodiment.

In such a configuration, a more adequate negative pressure is applied to a sheet member 11, a spring member 40, and a pressure plate 14, and the sheet member 11 is displaced downward as it is as ink consumption proceeds as shown in  
25 Fig. 14B unless the requirement represented by Equation 4 is satisfied. When the requirement represented by the same

expression is satisfied, it is obvious that air in a region upstream of a filter is transported into the ink tank 10' as in the above embodiments to be eliminated from the ink supply channel.

5 (Sixth Embodiment)

Fig. 15A and 15B are views for explaining a configuration and an operation of an ink supply system according to a sixth embodiment of the invention.

In the above-described embodiments, a connecting  
10 section having an ink flow channel and an air flow channel is provided at a recording head or a liquid chamber. The present embodiment employs a configuration in which an ink flow channel member 53A and an air flow channel member 54A are provided at an ink tank 10A configured substantially  
15 similarly to that in the first embodiment as shown in Fig. 15A and in which the members are stuck into a liquid chamber 50 as shown in Fig. 15B when mounted.

Head side openings 53Ah and 54Ah of the ink flow channel member 53A and the air flow channel member 54A, respectively,  
20 are closed by valves 53Av and 54Av that are urged by springs 53As and 54As when the ink tank 10A is not mounted. In the configuration, as the ink flow channel member 53A and the air flow channel member 54A are stuck into the liquid chamber 50A through a mounting section 50Aj, the valves 53Av and 54Av  
25 are engaged with the mounting section 50Aj and displaced relatively while compressing the springs 53As and 54As,

thereby opening the head side openings 53Ah and 54Ah.

In such a configuration, by mounting the ink tank 10A, operations similar to those in the first embodiment indicated by the states in Fig. 5 and later are performed to achieve  
5 a similar advantage. Specifically, in the present embodiment, the ink flow channel member 53A and the air flow channel member 54A are filled with ink, and pressures have already been generated in the positions of the openings of the respective members before the ink tank 10A is mounted, the pressures  
10 originating from a water head difference that depends on the lengths of the respective members. Therefore, when the ink tank 10A is mounted, discharge of air from the liquid chamber 50A through the air flow channel member 54A is started. In the first embodiment, the mounting of the ink tank 10 results  
15 in the state shown in Fig. 3 in which there is no difference between the vertical positions of menisci formed in the ink flow channel 53 and the air flow channel 54, which may necessitate an ink sucking operation or ink ejecting operation as shown in Fig. 4. On the contrary, the present embodiment  
20 is preferable in that such operations are not necessary because requirements for starting discharge of air have already been met at the time of mounting.

While the ink flow channel member 53A and the air flow channel member 54A are separate members in the illustrated  
25 embodiment, a connecting section whose interior is divided into two parts to form two flow channels may be used as in



the above embodiments.

(Seventh Embodiment)

Figs. 16A and 16B are views for explaining a configuration and an operation of an ink supply system  
5 according to a seventh embodiment of the invention.

While the sixth embodiment has addressed a case in which an ink flow channel and an air flow channel are provided at an ink tank, in the present embodiment, an ink flow channel member 53B is provided at an ink tank 10B substantially similar  
10 to that in the first embodiment in configuration, and an air flow channel member 54B is provided at a recording head or a liquid chamber 50B, as shown in Fig. 16A. Specifically, a configuration is employed in which, when the ink tank is mounted, the ink flow channel member 53B is stuck into the  
15 liquid chamber 50B and the air flow channel member 54B is stuck into the ink tank 10B as shown in Fig. 16B.

A head side opening 53Bh of the ink flow channel member 53B and a tank side opening 54Bt of the air flow channel member 54B are closed by valves 53Bv and 54Bv that are urged by springs  
20 53Bs and 54Bs, respectively, when the ink tank 10B is not mounted. As the ink flow channel member 53B and the air flow channel member 54B are stuck into the liquid chamber 50B and the ink tank 10B, respectively, the valves 53Bv and 54Bv are relatively displaced while compressing the springs 53Bs and  
25 54Bs, thereby opening the head side openings 53Bh and 54Bh. A valve 154v urged by a spring 154s is provided at an opening

154r of the ink tank 10B into which the air flow channel member 54b is stuck. A configuration is thereby provided in which the opening 154r is closed to prevent leakage of ink when the ink tank 10B is not mounted and in which the valve retracts while compressing the spring 154s to allow the air flow channel member 54B to be stuck as a mounting operation proceeds. Similarly, a valve 153v urged by a spring 153s is provided at an opening 153r of the liquid chamber 50B into which the ink flow channel member 53B is stuck. A configuration is thereby provided in which the opening 153r is closed when the ink tank 10B is not mounted and in which the valve retracts while compressing the spring 153s to allow the ink flow channel member 53B to be stuck as a mounting operation proceeds.

In this configuration, the ink flow channel 53B is filled with ink and the air flow channel 54B contains air in the state shown in Fig. 16A before the mounting of the ink tank 10B. Air is discharged when the ink tank 10B is mounted also in this state just as in the sixth embodiment, and there is no need for the ink sucking operation and ink ejecting operation for discharging the air. Further, the present configuration is preferable in that air can be easily discharged even when the length of each flow channel member is small because it is easy to provide a great difference between the elevations of the opening 53Bh of the ink flow channel member 53B and the opening 54Bt of the air flow channel member 54Bt.

(Eighth Embodiment)

Fig. 17 is an enlarged view of a connecting section for explaining an eighth embodiment of the invention.

A connecting section 51 of the present embodiment is provided with two flow channels by dividing the interior of the same into two parts as in the first embodiment. In the present embodiment, however, an air flow channel 54 has two head side openings, i.e., a first opening 54c provided on a side of the flow channel and a second opening 54d that is substantially equal in elevation to a head side opening 53h of an ink flow channel. This results in two differences in operation from the first embodiment. First, this facilitates an ink ejecting operation for charging the air flow channel with ink. Since the second opening 54d is in substantially the same position as the head side opening 53h of the ink flow channel and is in contact with ink, the ink is prevented from dropping as seen in the state in Fig. 4 in the first embodiment. The point is therefore the fact that the charging of the air flow channel with ink is completed with the negative pressure in the liquid chamber 50 kept lower than that in the state in Fig. 4. The other point is that meniscus at the first opening 54c is easier to move than those in the first embodiment when the ink charging is completed. When meniscus is formed at the first opening 54c, the mobility of the meniscus is determined by the balance between a pressure originating from the meniscus and a pressure originating from

a water head difference between the first opening 54c and the position of the liquid level in the liquid chamber 50. In the present embodiment, since gravity on the ink residing between the first opening 54c and the second opening 54d of the air flow channel 54 is added as a force acting on the meniscus rightward in the figure, the meniscus is in a state in which it is easy to move to the right.

Further, when the air flow channel 54 and the ink flow channel 53 are formed in the same member as in the present configuration, there is another advantage in that manufacturing accuracy of the connecting section can be maintained because the length of those channels can be made equal to each other.

(Specific Configuration Example of Ink Supply System)

Fig. 18A is an exploded perspective view showing a specific configuration example of an ink tank to which the first embodiment is applied. Fig. 18B is a transverse sectional view of an ink containing chamber portion.

Reference numerals 15A and 15B denote a casing member and a lid member, respectively, which form the outer casing 15 of the ink tank 10. The inside of the outer casing 15 is generally divided into three chambers: the ink containing chamber 12, a valve chamber 30, and a receiving chamber 65 of the connecting section 51.

The spring 40 disposed in the ink containing chamber 12 is formed, in the illustrated example, by combining a pair

of leaf spring members 40A, each having a substantially U-shape in section, with their U-shaped open ends opposed to each other. A mode of this combination can be configured such that each leaf spring member 40A is made to have a concave and  
5 a convex portion formed at both ends and the concave portion of one leaf spring member 40A is thus mated with the convex portion of the other.

Furthermore, the pressure plates 14 are deposited, parallel to each other, on the back face portions of the  
10 individual leaf spring members. The back face of one leaf spring member is bonded to the inner plane portion of the convex portion of the sheet member 11. The sheet member 11 has the periphery portion adhered on a rib 15C provided on the lid member 15B. A space between the sheet member 11 and  
15 the lid member 15B is opened to atmosphere via an atmosphere communication hole 15D. This allows the sheet member 11 to be displaced or deformed as ink is consumed.

The spring 35, sheet member 31, and pressure plate 34 are housed in the valve chamber 30. Furthermore, the seal  
20 member 37 is attached to the lid member 15B such that the communication hole 36 can be opened and closed.

The sealing member 17 is housed in the receiving chamber 65 for the connecting section 51. In this example, the sealing member 17 includes a member 17A that forms an opening, into  
25 which the connecting section 51 sticks, at least of which periphery of the opening is made of elastic material such

as rubber, a ball-like valve body 17B that can close the opening, and a spring 17C that urges the valve body 17B toward its closing position. Since an inside of ink tank 10 is under a negative pressure by a force of spring 40 even before being mounted, it is desirable to set the force of spring 17C in an appropriate condition to have valve body 17B seal the opening of the member 17 properly so as to avoid an ink leakage from the opening before being mounted.

Figs. 19A and 19B mainly show a specific configuration example of the ink supply system to which the configuration of the first embodiment shown in Fig. 1 is applied. Here, the ink tank 10, adopting the basic configuration shown in Figs. 18A and 18B, is schematically shown in Figs. 19A and 19B.

The ink tank 10 is attachable to and detachable from a carriage 153 holding the recording head 20 or the liquid chamber 50. When the ink tank 10 is attached to the carriage from thereabove in the arrowed direction as shown in Fig. 19A, a part of the tank outer casing 15 engages a latch portion 153A, thus holding the attached state as shown in Fig. 19B.

Reference numeral 55 denotes a closing member, up and down movably provided in the carriage 153, which is urged upward by a spring 56 to close the tank side openings of the ink flow channel 53 and air flow channel 54 during the non-attachment of the tank. This closing member 55 is moved down as the attachment of the ink tank 10 is carried out,

thereby allowing the connecting section 51 to stick into the receiving portion 65 while opening the tank side opening of the connecting section 51.

In this example, the inner diameters of the air flow channel 54 and ink flow channel are both set to 0.8 mm, the length of the air flow channel (the length from the tank side opening to the head side opening) is set to 12 mm, and the length of the ink flow channel is set to 28 mm. Besides, the air and ink flow channels are both formed of the same stainless steel member. In this state, the present inventors have confirmed that air is reliably discharged when the height of the head side opening portion of the air flow channel from the liquid level is 5 mm or more. Specifically, when air is accumulated in the liquid chamber 50 and reaches 8 mm or more the height of the head side opening portion of the air flow channel from the liquid level reaches 8 mm or more, air is discharged through the next tank replacement. Accordingly, even when the ink flow channel is shortened to about 20 mm, it will not affect the air discharge.

Furthermore, in the state where the ink height of the liquid level in the liquid chamber 50 from the face of the filter 23 is 5 mm, the following have been confirmed: even when ink is supplied with the ink flow rate or volume set to 8 g/min, air will not be entrained or drawn into the downstream side of the filter, so that satisfactory recording is performed. Accordingly, when air is accumulated in the

liquid chamber 50, air is reliably discharged to the ink tank 10 side. Furthermore, it becomes possible that a high flow rate is obtained to perform high-speed recording, and it is possible to provide a very compact ink supply system as a whole.

Besides, in any embodiment, the number of flow channels is not limited to two, but the connecting section may be provided with three flow channels or more. Besides, even when providing a connecting section whose inside is divided into a plurality of portions to form a plurality of flow channels, a partition wall between the flow channels is not only linearly formed as in the aforesaid example but also concentrically formed, thereby enabling providing a connecting section of multiple tube configuration.

Furthermore, when providing the connecting section whose inside is divided into a plurality of portions to form a plurality of flow channels, unless the transfer of gas and the movement of ink interfere with each other to hinder smooth and rapid gas-liquid exchange, the individual flow channels may not be completely separated from each other.

Besides, in the aforesaid, the valve chamber 30 for introducing ambient air into the ink tank 10 is made integral with the ink tank 10. However, if ambient air can be introduced directly into the ink tank 10 without via the liquid chamber 50, the valve chamber may not necessarily be formed integral with the ink tank.



Figs. 20A and 20B show a specific configuration example of such an ink supply system. This ink supply system has substantially the same configuration as in Figs. 19A and 19B, except a valve chamber 30" is disposed on the carriage 153 side. The internal configuration of this valve chamber 30" is substantially the same as that of the aforesaid valve chamber 30, except a hollow needle 39 for introducing atmosphere projects upward from the valve chamber 30". Thus, the configuration is made such that as the attachment of an ink tank 10" is carried out, the hollow needle 39 sticks into the ink tank 10" via a sealing member 19, made of elastic member such as rubber, provided in the ink tank 10".

Even with such a configuration, the same operation as in the aforesaid first embodiment is performed and the same advantageous effect is obtained.

#### Example of Structure of Inkjet Printing Apparatus

Fig. 21 is a perspective view of an example of an inkjet recording apparatus to which the invention can be applied.

Such a recording apparatus is a serial type inkjet printing apparatus. In the recording apparatus 150 of the present embodiment, a carriage 153 is guided by guide shafts 151 and 152 such that it can be moved in main scanning directions indicated by the arrow A. The carriage 153 is moved back and forth in the main scanning direction by a carriage motor and a driving force transmission mechanism such as a belt for transmitting a driving force of the same motor. The

carriage 153 carries an ink supply system 154 which may have any configuration of the above embodiments, for example as shown in Figs. 19A and 19B, including an inkjet recording head, a liquid chamber (not shown in Fig. 17) and an ink tank for supplying ink to the inkjet recording head. Paper P as a recording medium is inserted into an insertion hole 155 provided at a forward end of the apparatus and is then transported in a sub-scanning direction indicated by the arrow B by a feed roller 156 after its transporting direction is inverted. The recording apparatus 150 sequentially forms images on the paper P by repeating a recording operation for ejecting ink toward a printing area on the paper P supported by a platen 157 while moving the recording head in the main scanning direction and a transporting operation for transporting the paper P in the sub-scanning direction a distance equivalent to a recording width.

The inkjet recording head may utilize thermal energy generated by an electrothermal transducer element as energy for ejecting ink. In this case, film boiling of ink is caused by the heat generated by the electrothermal transducer element, and ink is ejected from an ink ejection port by foaming energy generated at that time. The method of ejecting ink from the inkjet recording head is not limited to such a method utilizing an electrothermal transducer element and, for example, a method may be employed in which ink is ejected utilizing a piezoelectric element.

At the left end of the moving range of the carriage 153 in Fig. 21, there is provided a recovery system unit (recovery process unit) 158 that faces a surface of the inkjet printing head carried by the carriage 153 where an ink ejecting portion are formed. The recovery system unit 158 is equipped with a cap capable of capping the ink ejection portion of the recording head and a suction pump capable of introducing a negative pressure into the cap, and the unit can performs recovery process for maintaining a preferable ink ejecting condition of the inkjet recording head by introducing a negative pressure in the cap covering the ink ejection portion to suck and discharge ink through the ink ejection ports or orifices. Further, a recovery process for maintaining a preferable ink ejecting condition of the inkjet recording head by ejecting ink towards the cap (also referred to as "preliminary ejection process") may be performed other than the image forming. These processes may be performed to satisfy the condition expressed by Equation 4 or 11 when a new ink tank is installed.

(Others)

The aforesaid embodiments of the ink supply system basically all adopt the configuration made such that ink is stored or supplied directly without using an absorber or the like to hold ink therein. At the same time, negative pressure generating means is formed by a movable member (sheet member, pressure plate) and a spring member for urging this movable

member. Besides, a sealing structure is formed inside the supply system. Thereby, the configuration is made such that a proper negative pressure is applied to the recording head.

In such configurations, volumetric efficiency is high  
5 and a degree of freedom in selecting ink can also be improved,  
as compared with the configuration in the conventional  
technique for generating a negative pressure through the  
absorber. In addition thereto, such configurations can also  
desirably meet a demand for the increase in flow rate or volume  
10 and stabilization of ink supply required as recording has  
been speeded up in recent years.

With the object of eliminating a gas stagnating in a  
supply channel on which object the invention particularly  
focuses, such a stagnant gas is transferred or discharged  
15 to the ink tank at the most upstream position farthest from  
the recording head. For this purpose, the configuration is  
made as follows. The ink tank and the ink supply channel are  
connected to each other via a plurality of flow channels.  
Besides, ink introduction out of the ink tank and gas  
20 introduction into the ink tank are performed in parallel by  
utilizing the balance in pressure between the ink tank and  
the ink supply channel.

According to such a configuration, the stagnant gas  
in the supply channel can be smoothly and rapidly eliminated  
25 and transferred to the ink tank side without the need for  
a complex apparatus and with a small increase in the number

of components and a simple structure. Besides, the elimination is automatically timed in accordance with the balance in pressure when the gas has accumulated to some extent, so that the reliability of the gas elimination is high.

5        Besides, the negative pressure in the ink tank is always maintained in the process of the gas elimination. Therefore, liquid leakage from the ink ejection openings or the like of the inkjet recording head can be reliably prevented. Furthermore, the gas is eliminated and transferred to the  
10 ink tank side, whereby the amount of consumption of ink can be strikingly reduced, as compared with the method in which ink is sucked from the ejection openings of the recording head to thereby eliminate the gas. Thus, ink is kept from wasting away to contribute even to a reduction in running  
15 costs.

      In addition, when using an ink tank configured to be attachable to and detachable from the supply channel, conventionally, to prevent a gas from entering the supply channel side during the ink tank replacing operation, the  
20 ink tank has been replaced in many cases, in the state where the supply channel is filled with ink, i.e., before ink is completely consumed. However, according to the aforesaid configuration, even if a gas enters the inside of the supply channel during the replacing operation, when a new ink tank  
25 is attached, the gas can be easily and rapidly eliminated from the ink tank. Therefore, the ink tank can be replaced

after ink is completely consumed, thereby not only enabling a further reduction in running costs but also greatly contributing to environmental quality improvement. Furthermore, in any of the aforesaid embodiments, the ink tank is arranged at the highest elevation and the supply section or the recording head is arranged at the low elevation in terms of their positions during the normal use. This is a very desirable arrangement in performing the gas-liquid exchange rapidly and smoothly and with a simple configuration.

10        Additionally, although depending upon the configuration of the ink tank, a gas introduced into the ink tank may be stored anywhere inside the ink tank if stored at a position such that the gas will not return to the ink supply channel and the ink supply will not be hindered. However,

15        the configuration of the aforesaid embodiment such that ink is stored directly without being impregnated into the absorber or the like is preferable because the gas introduced will be positioned directly in the uppermost portion inside the ink tank.

20        Thus, when the absorber is not in the ink tank, the volume of the tank itself can become the volume of ink. Therefore, the ink tank need not be more increased in volume than necessary, and the shape of the tank can also be comparatively freely designed.

25        Basic conditions for constituting the invention lie in the following configurations. The liquid chamber has a

closed structure for storing ink directly except a portion connected to the ink tank and a portion connected to the recording head. Moreover, atmosphere introduction for maintaining a desirable negative pressure is performed  
5 directly with respect to the ink tank, so that a gas will not enter the liquid chamber communicating directly with the recording head. These conditions are significantly desirable in realizing the increase in flow rate or volume and stabilization of ink supply and always satisfactorily  
10 maintaining ejection characteristics even when high-speed recording (ejection) is performed. Besides, these conditions are not disclosed or suggested in any of the above documents.

As long as the negative pressure generating means has any configuration that fulfills these basic conditions, it  
15 can adopt any other configuration in addition to the configuration made by the combination of a spring and a flexible member as in the aforesaid each embodiment. That is, the basic conditions of the invention will not exclude the adoption of an absorber acting as the negative pressure  
20 generating means.

Fig. 22 is a configuration example of the ink supply system configured such as to fulfill the aforesaid basic conditions even while using the absorber. Here, like reference numerals are given to corresponding portions out of the  
25 individual portions that can be configured similarly to those of Figs. 19A and 19B.

In the configuration of this example, an ink tank 100 contains includes a liquid containing chamber 120 for directly containing ink and directly supplying ink to the liquid chamber and for receiving a gas discharge, and a negative pressure generating member housing chamber 401 that communicates with this liquid containing chamber 120, houses an absorber 400 acting as a member for sucking a liquid to thereby generate a negative pressure, and has the inside opened to atmosphere. The basic conditions of the invention can be fulfilled even by such a configuration and the number of components can be reduced to simplify the manufacturing process. Besides, needless to say, a gas existing on the side of the liquid chamber formed to have the closed structure can be rapidly and reliably transferred to and retained in the ink tank spaced away from the recording head, in accordance with the conditions of the pressure inside the ink tank, the pressure originating from a water head difference in each flow channel, and the pressure originating from a meniscus formed in each flow channel.

Besides, in the aforesaid description, the inkjet recording apparatus of serial type has been applied as the recording method of this embodiment. However, the invention and this embodiment are not limited thereto. Besides, the invention and this embodiment can be applied even to a recording apparatus of line scan type instead of serial type. Furthermore, needless to say, a plurality of liquid supply



systems can be provided in correspondence to the color tones of ink (color, density and the like).

While the above description has referred to the application of the invention to an ink tank for supplying  
5 ink to a recording head, the invention may be applied to a supply section for supplying ink to a pen as a recording section.

In addition to various recording apparatus as thus described, the invention may be used in a wide range including  
10 apparatus for supplying various liquids such as drinking water and liquid flavoring materials and apparatus for supplying pharmaceuticals in the medical field.

The present invention has been described in detail with respect to preferred embodiments, and it will now be apparent  
15 from the foregoing to those skilled in the art that changes and modifications may be made without departing from the invention in its broader aspect, and it is the intention, therefore, in the apparent claims to cover all such changes and modifications as fall within the true spirit of the  
20 invention.

## CLAIMS

1. A liquid supply system, comprising:  
a liquid consuming section for consuming a liquid;  
5 a liquid chamber communicating with said liquid consuming section;  
a liquid containing section for containing the liquid;  
and  
plural communication channels for providing  
10 communication between said liquid chamber and said liquid containing section, wherein  
said liquid chamber forms a substantial closed space except said plural communication channels and said liquid consuming section, and  
15 said liquid containing section has means for adjusting a pressure inside the system.
2. A liquid supply system as claimed in claim 1, wherein  
said pressure adjusting means performs the pressure  
20 adjustment so that a pressure that prevents leakage of the liquid from said consuming section and that permits a liquid consuming state of said consuming section acts inside the system.
- 25 3. A liquid supply system as claimed in claim 2, wherein  
said pressure adjusting means has means for placing said liquid

consuming section into a negative pressure state relative to an atmosphere pressure and means for introducing atmosphere directly into said liquid containing section without via said liquid chamber in order to adjust the negative pressure state.

5

4. A fluid communication structure for providing fluid communication between a liquid containing section for containing a liquid and a liquid consuming section for consuming the liquid, said fluid communication structure

10 comprising:

a liquid chamber communicating with said liquid consuming section; and

plural communication channels for providing communication between said liquid chamber and said liquid  
15 containing section, wherein

said liquid chamber forms a substantial closed space except said plural communication channels and said liquid consuming section, and in a state where a gas exists inside the closed space, the gas can be transferred to said liquid  
20 containing section via a part of said plural communication channels.

5. A fluid communication structure as claimed in claim 4, wherein said fluid communication structure, in terms of  
25 its position during liquid consumption, is positioned substantially below said liquid containing section and

positioned substantially above said liquid consuming section with reference to a vertical direction.

6. A fluid communication structure as claimed in claim 5, wherein said plural communication channels have different heights of their opening positions in said liquid chamber side with reference to a vertical direction.

7. A fluid communication structure as claimed in claim 4, wherein in accordance with a relationship between a pressure difference originating from a water head of the liquid corresponding to a difference among the vertical heights of openings of said plural communication channels, inside said liquid consuming section and a difference among pressures originating from menisciuses formed by the liquid in the individual communication channels, an operation is performed such that, the gas in said closed space is transferred to said liquid containing section via the part of said plural communication channel, while the liquid is moved from said liquid containing section to said liquid consuming section via another part of said plural communication channels.

8. A fluid communication structure as claimed in claim 4, wherein only the part of said plural communication channels is formed such that a pair of the openings inside said liquid consuming section comes into contact with an inner wall of

said liquid consuming section.

9. A fluid communication structure as claimed in claim  
4, wherein only the part of said plural communication channels  
5 has a portion forming a groove extending along the  
communication channel and projecting from the opening of the  
communication channel inside said liquid chamber.

10. A fluid communication structure as claimed in claim  
10 4, wherein only the part of said plural communication channels  
is configured such that its opening inside the liquid consuming  
section is always in contact with a liquid present in said  
liquid consuming section.

15 11. A fluid communication structure as claimed in claim  
4, wherein inner walls of said plural communication channels  
have different contact angles with the liquid.

12. A fluid communication structure as claimed in claim  
20 4, wherein said plural communication channels have different  
inside diameters.

13. An ink supply system, comprising:  
a recording head for ejecting an ink;  
25 a liquid chamber communicating with said recording head;  
an ink tank for containing the ink; and

plural communication channels for providing communication between said liquid chamber and said ink tank, wherein

said liquid chamber forms a substantial closed space  
5 except said plural communication channels and said recording head, and

said ink tank has means for adjusting a pressure inside the system.

10 14. An ink supply system as claimed in claim 13, wherein said pressure adjusting means performs the pressure adjustment so that a pressure that prevents leakage of the ink from said recording head and that permits an ink ejecting state of said recording head section acts inside the system.

15

15. An ink supply system as claimed in claim 14, wherein said pressure adjusting means has means for placing said recording head into a negative pressure state relative to an atmosphere pressure and means for introducing atmosphere  
20 directly into said ink tank without via said liquid chamber in order to adjust the negative pressure state.

16. An ink supply system, comprising:  
a recording head for ejecting an ink;  
25 a liquid chamber communicating with said recording head;  
an ink tank for containing the ink; and

plural communication channels for providing communication between said liquid chamber and said ink tank, wherein

said liquid chamber forms a substantial closed space  
5 except said plural communication channels and said recording head, and

on ejecting of the ink from said recording head, atmosphere is introduced into said ink tank with liquid chamber side opening portions of said plural communication channels  
10 being in contact with the ink.

17. An ink tank that is connected via plural communication channels to a liquid chamber communicating with a recording head for ejecting an ink and thereby comes into fluid  
15 communication with said liquid chamber, said liquid chamber forming a substantial closed space except said plural communication channels and said recording head, said ink tank comprising means for adjusting a pressure inside an ink supply system for supplying the ink to said recording head.

20

18. An ink tank as claimed in claim 17, further comprising a connecting section capable of making connection to said plural communication channels.

25 19. An ink tank as claimed in claim 17, wherein said ink tank has at least a part of said plural communication channels

integral therewith.

20. An ink tank as claimed in claim 17, wherein said pressure  
adjusting means has a movable section that forms at least  
5 a partial portion of an ink containing space and is displaced  
or deformed to enable changing an internal volume of the ink  
containing space and urging means for urging said movable  
section in a direction for increasing the internal volume  
to thereby place the inside of said recording head into a  
10 negative pressure state relative to an atmosphere pressure.

21. An ink tank as claimed in claim 20, wherein said pressure  
adjusting means further has means for introducing atmosphere  
directly into said ink tank in order to adjust the negative  
15 pressure state.

22. An ink tank as claimed in claim 17, further comprising:  
an ink containing chamber, for containing the ink directly,  
which is connected to said liquid chamber via said plural  
20 communication channels; a negative pressure generating  
member, communicating with said ink containing chamber, for  
placing the inside of the supply system into a negative  
pressure state; and an atmosphere introducing hole capable  
of introducing atmosphere into the inside of said chamber.

25

23. An inkjet recording head for ejecting an ink to thereby



perform recording, the inkjet recording head having the fluid communication structure as claimed in claim 4 integral therewith.

5 24. An inkjet recording apparatus, wherein an ink supply system as claimed in claim 13 is used to perform recording as holding said ink supply system such that said liquid chamber is positioned substantially above said recording head and said ink tank is positioned substantially above said liquid  
10 chamber, in terms of their positions in use, with reference to a vertical direction.

25. An ink supply system, comprising:  
a recording head for ejecting an ink;  
15 a liquid chamber communicating with said recording head;  
an ink tank for containing the ink;  
plural communication channels for providing communication between said liquid chamber and said ink tank;  
and  
20 means for introducing atmosphere directly into said ink tank without via said liquid chamber.

26. An ink tank that is connected via plural communication channels to a liquid chamber communicating with a recording  
25 head for ejecting an ink and thereby comes into fluid communication with said liquid chamber, said ink tank

comprising :

means for introducing atmosphere directly into said ink tank without via said liquid chamber; and

means for adjusting a pressure inside an ink supply  
5 system for supplying the ink to said recording head.

10/529101

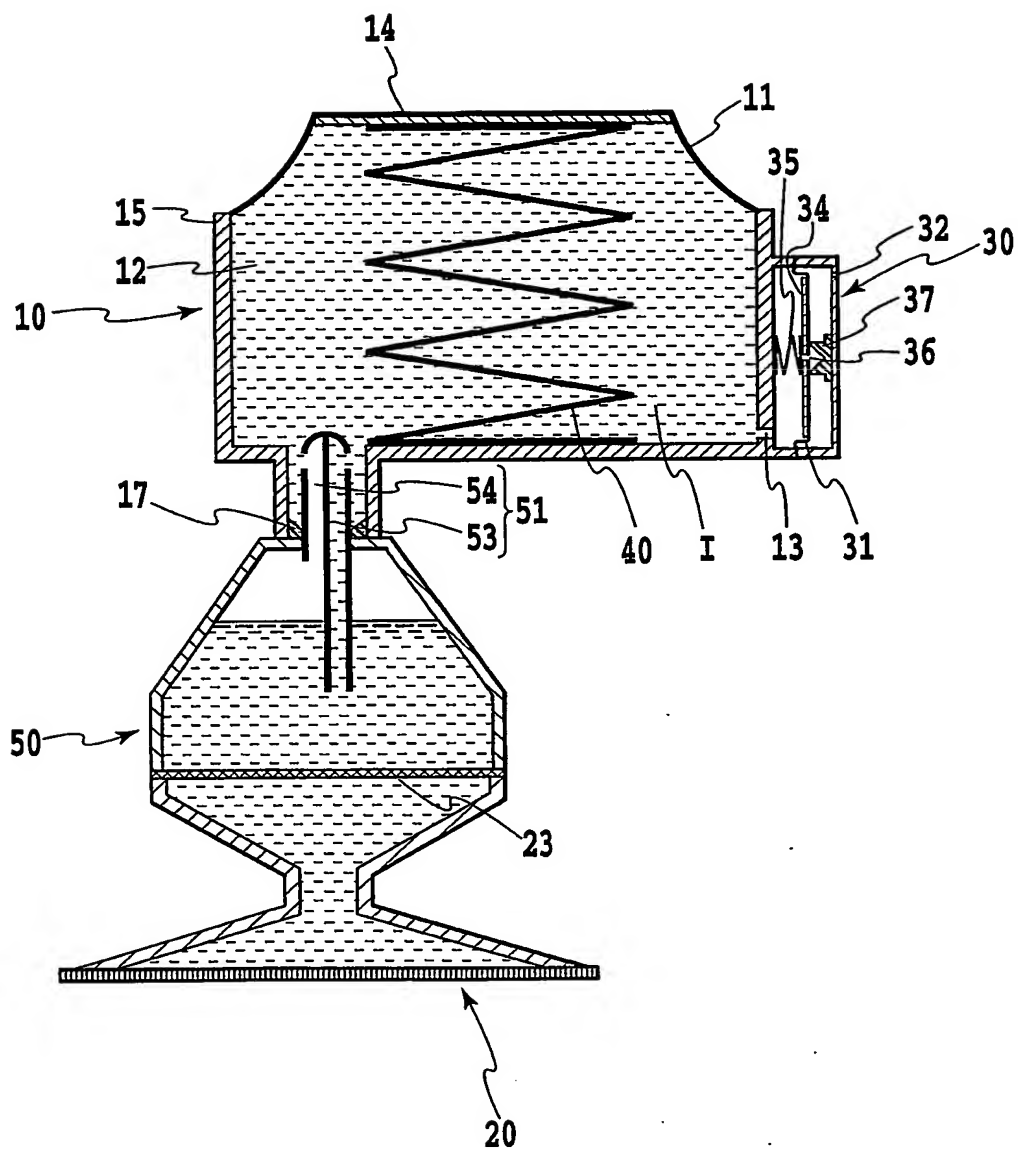


FIG.1

10/529101

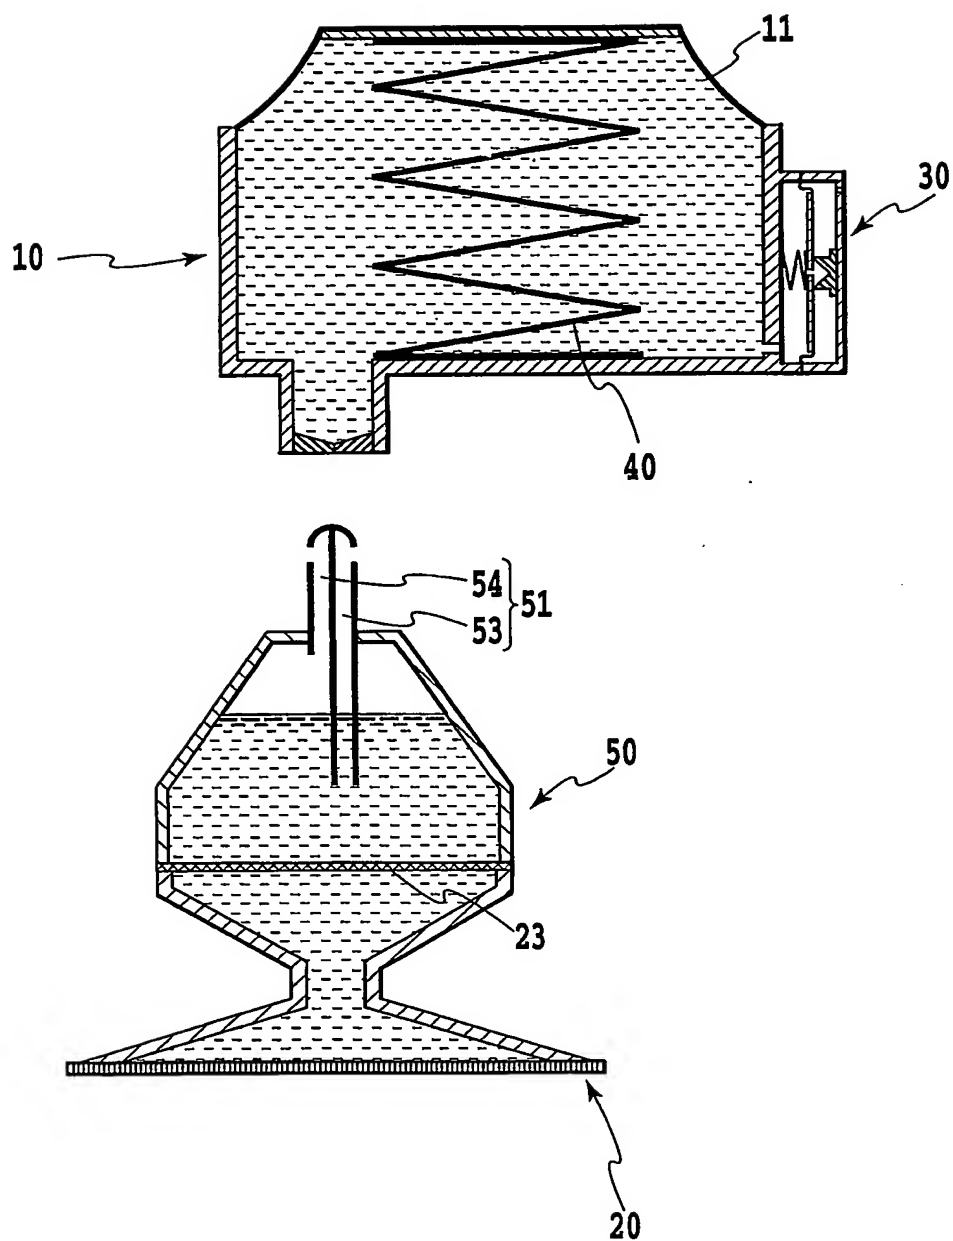


FIG.2

10/529101

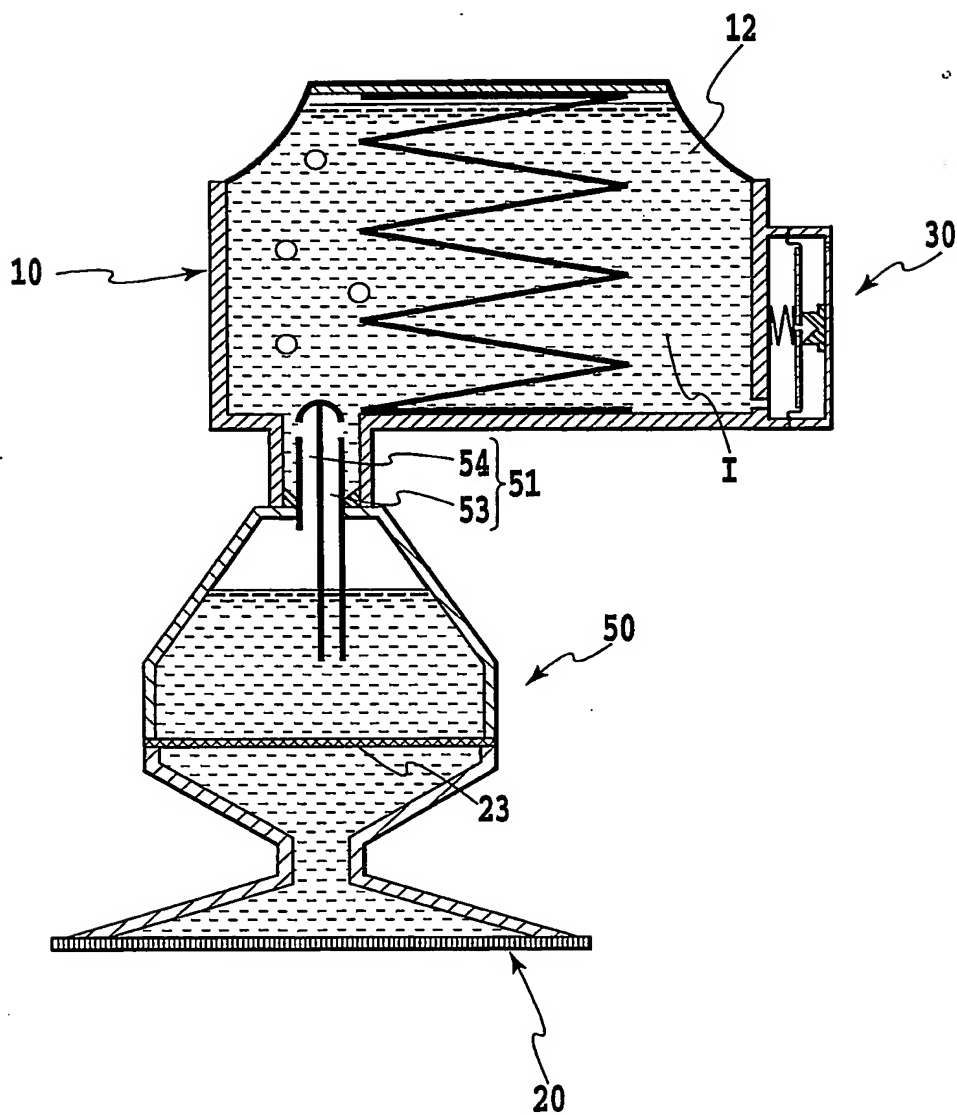


FIG.3

10/529101

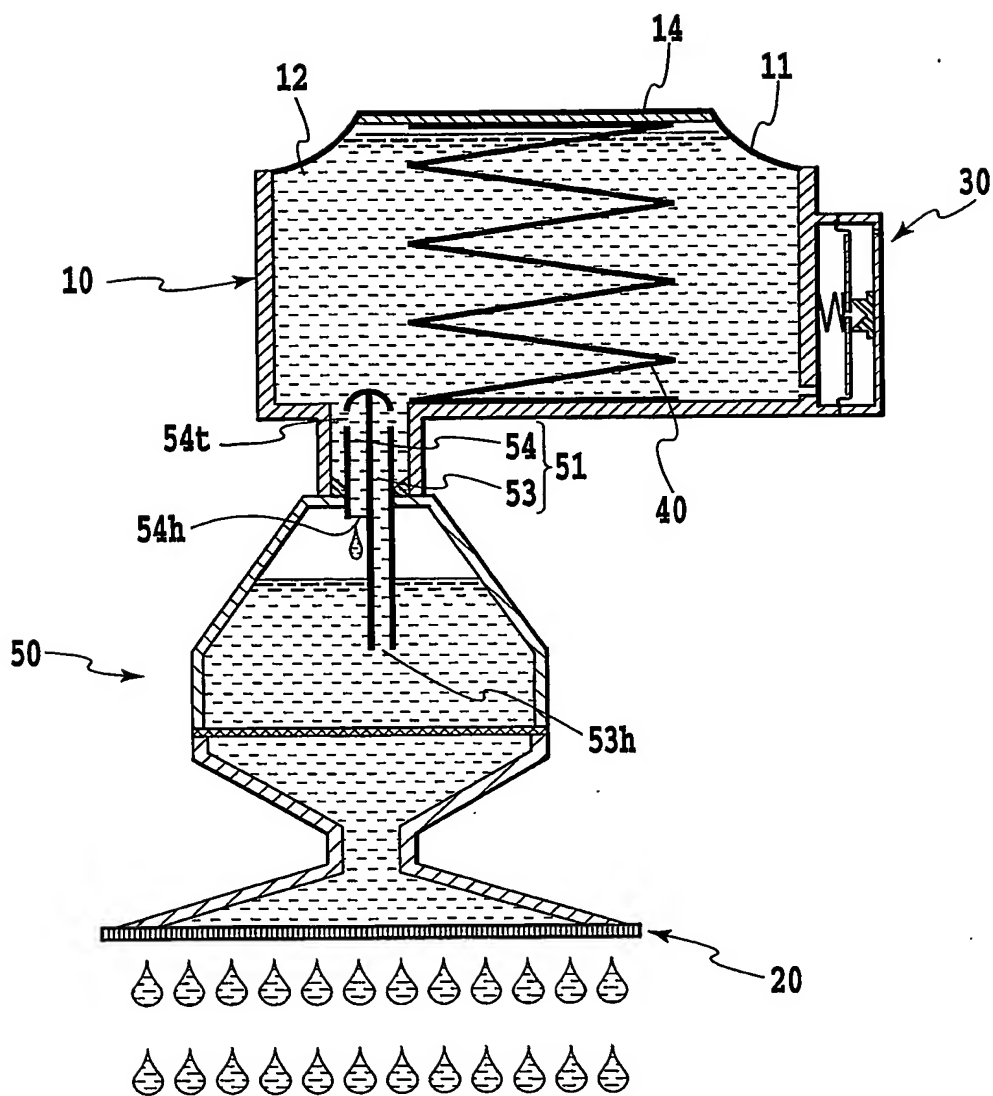


FIG.4

10/529101

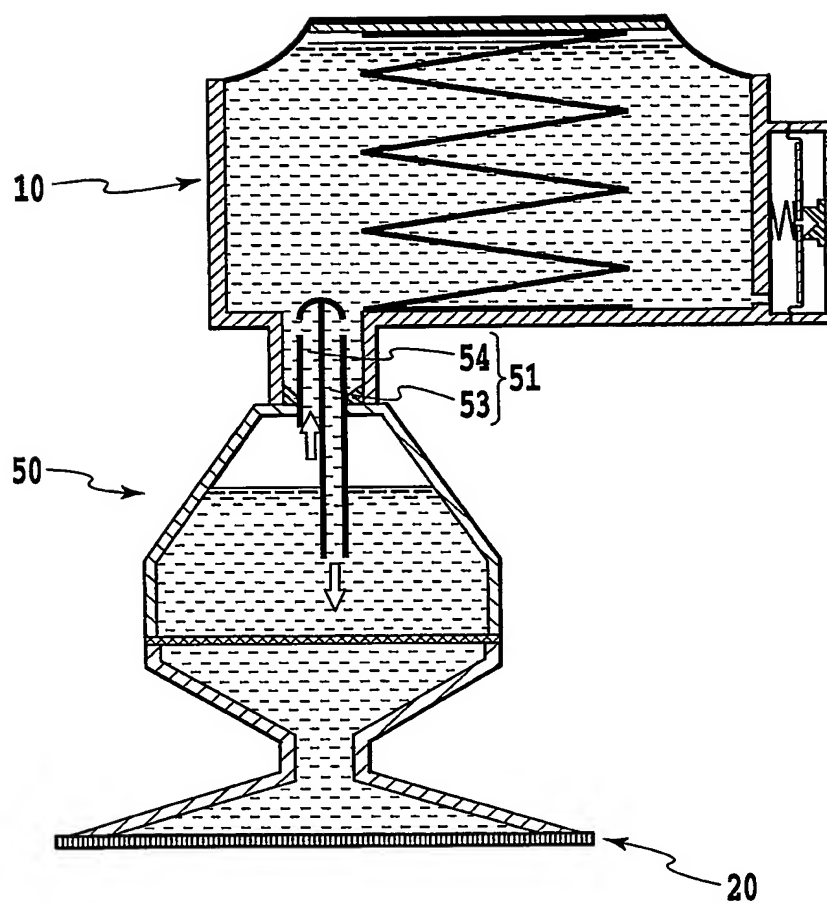


FIG.5

10/529101

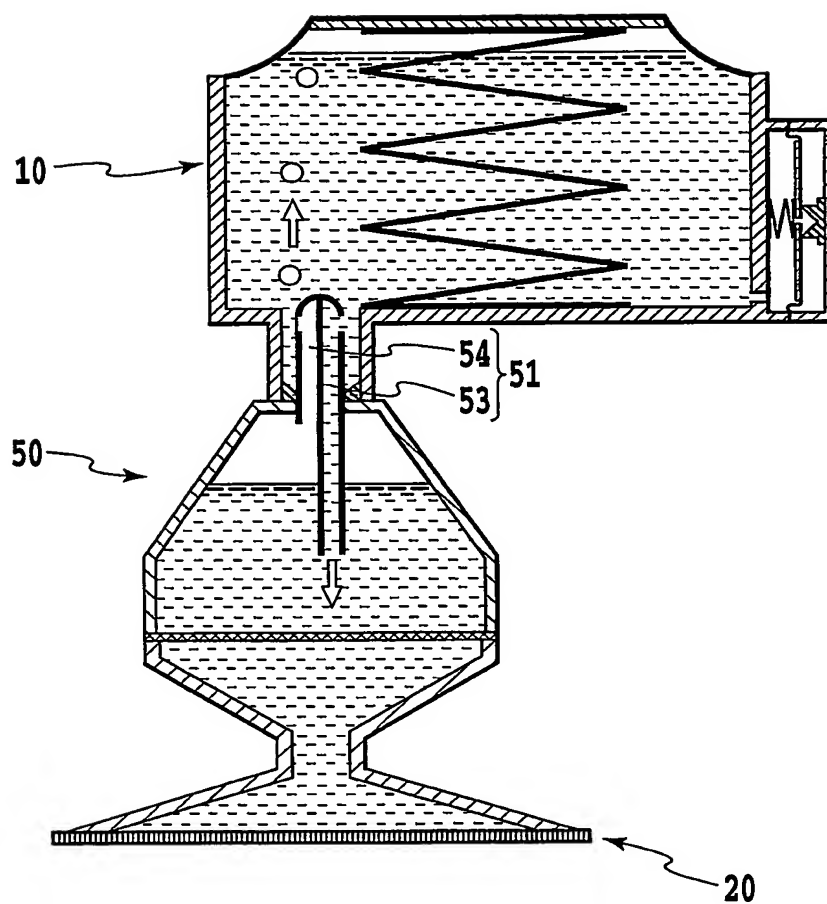


FIG. 6



10/529101

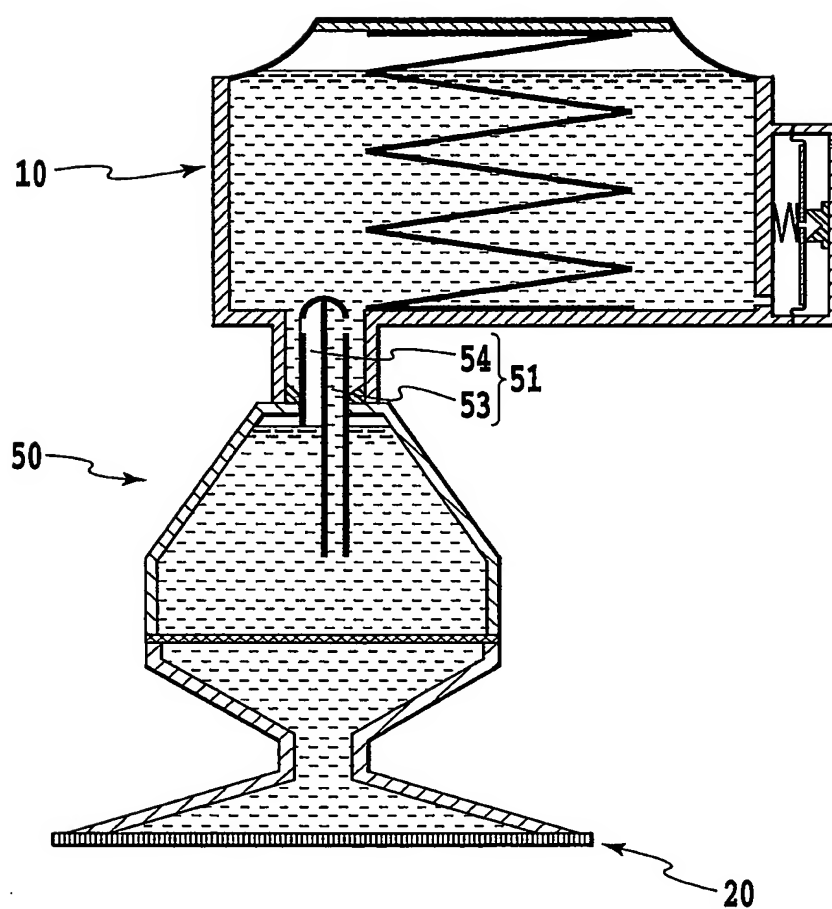


FIG.7

10/529101

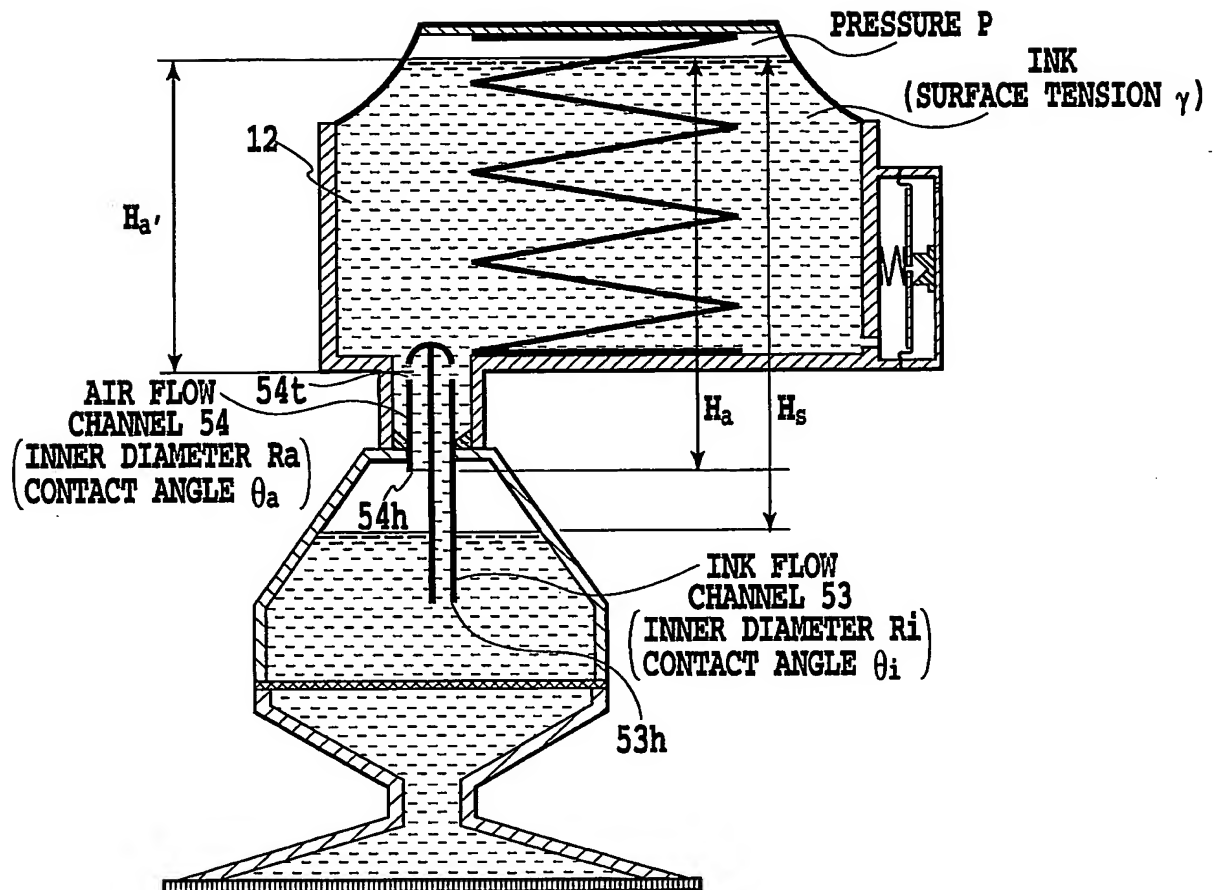


FIG.8

10/529101

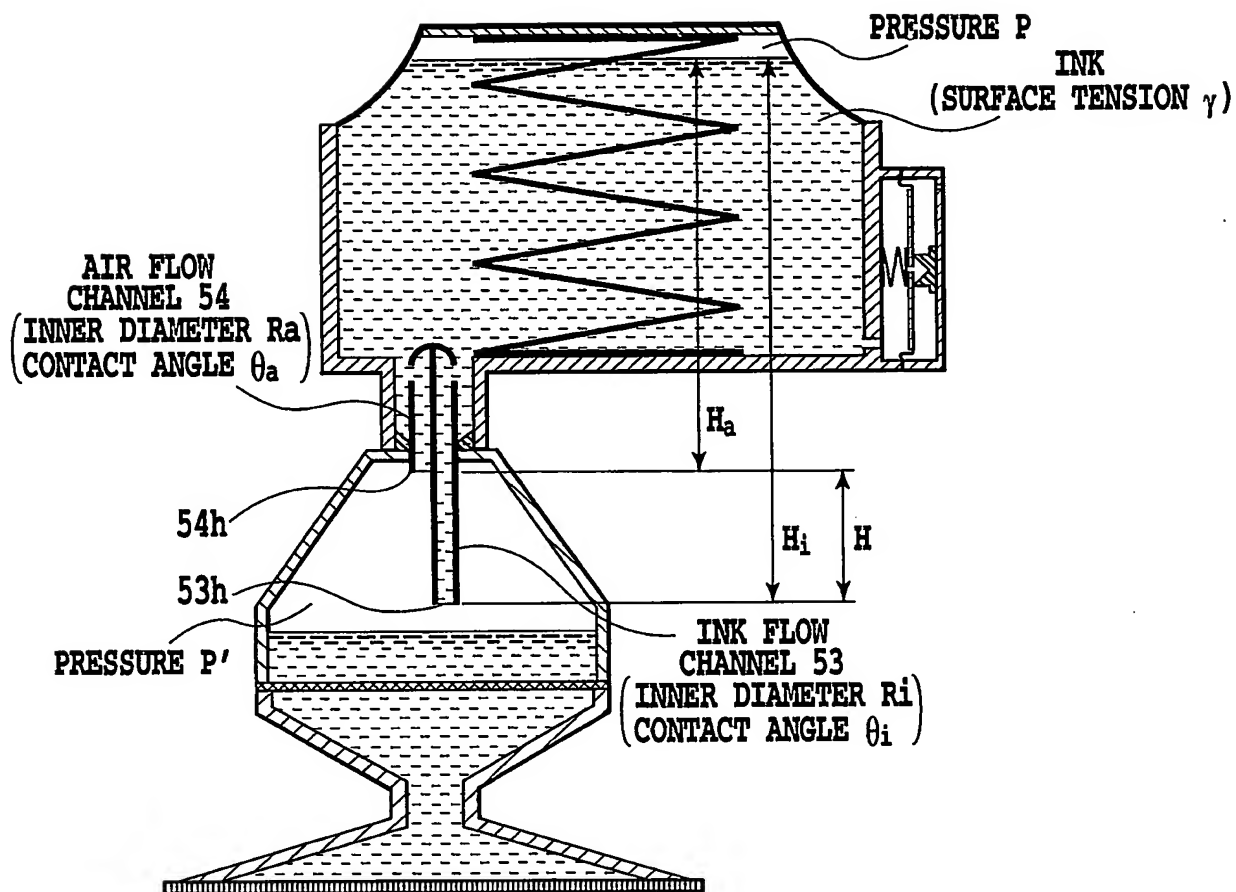


FIG.9

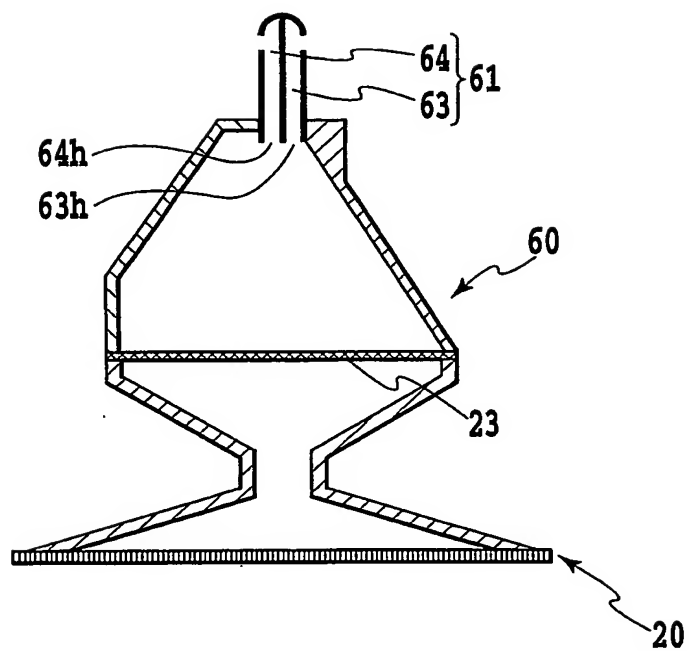


FIG.10

10/529101

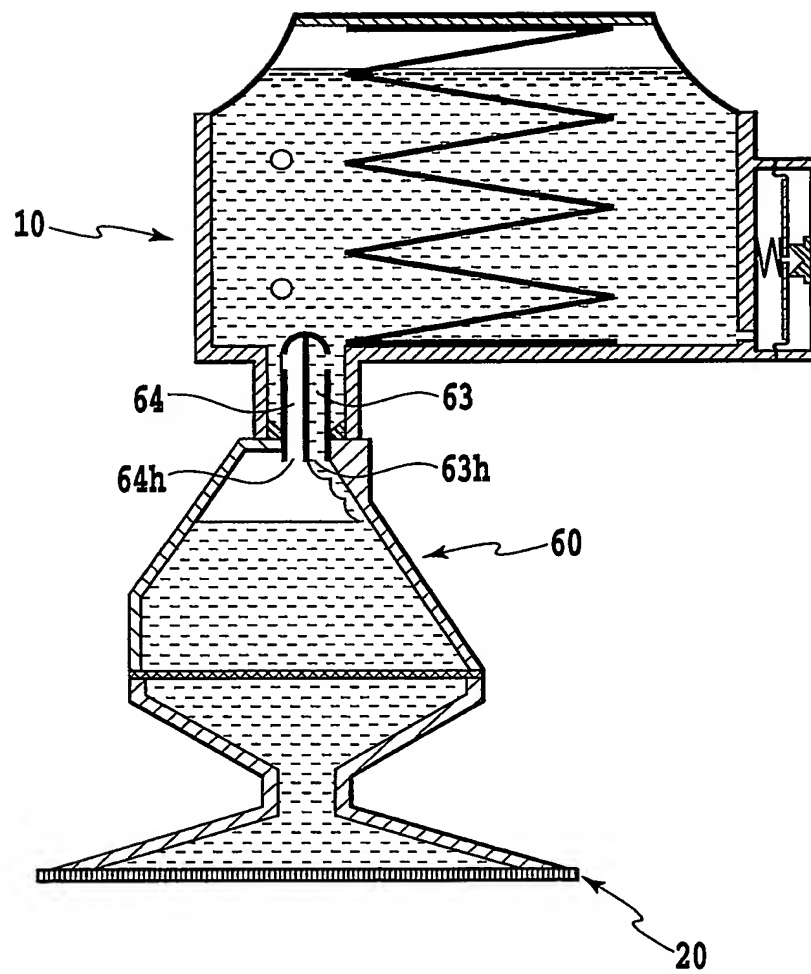


FIG.11

10/529101

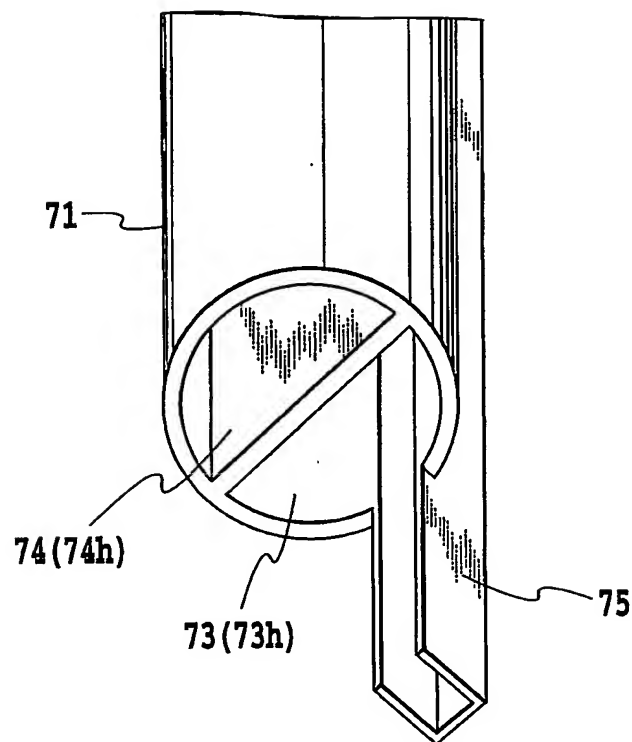


FIG.12

10/529101

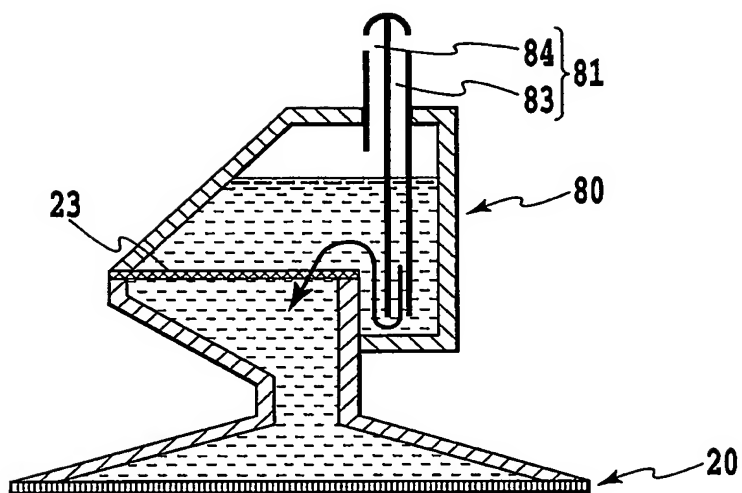


FIG.13A

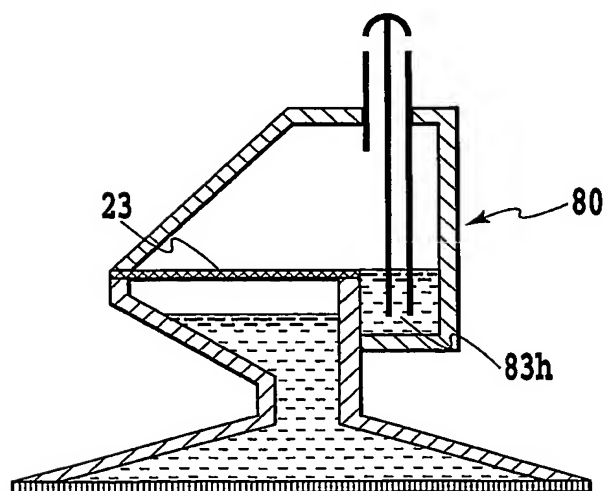


FIG.13B

10/529101

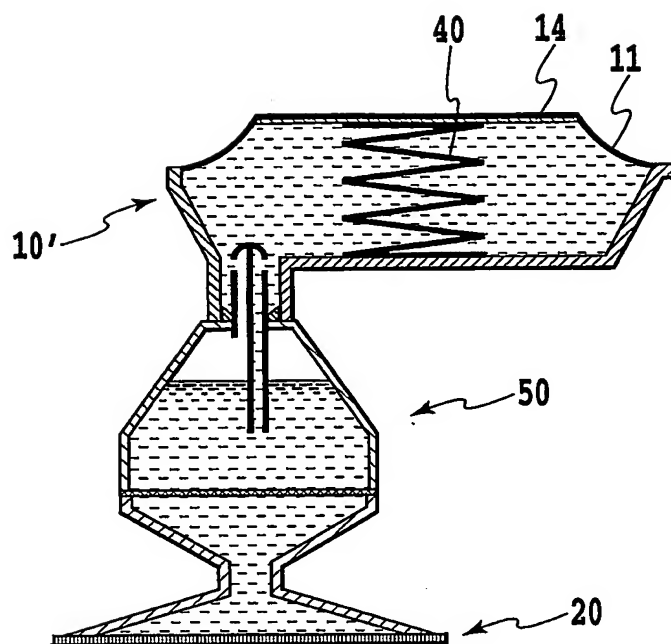


FIG. 14A

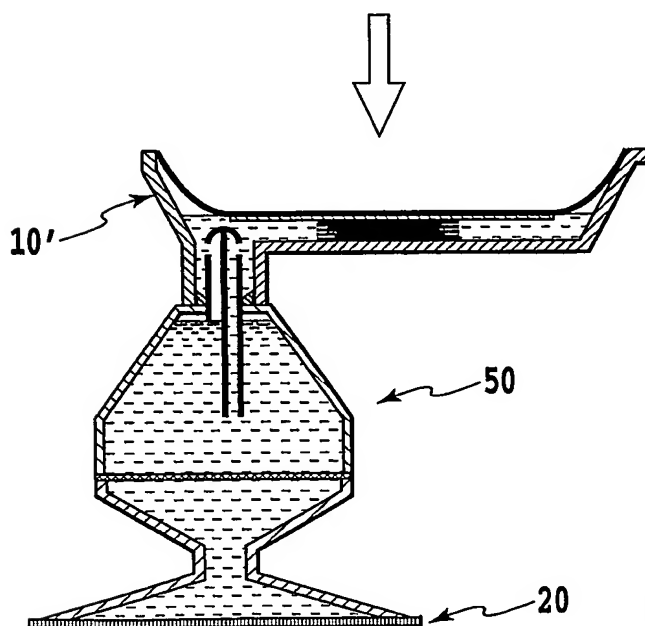


FIG. 14B



10/529101

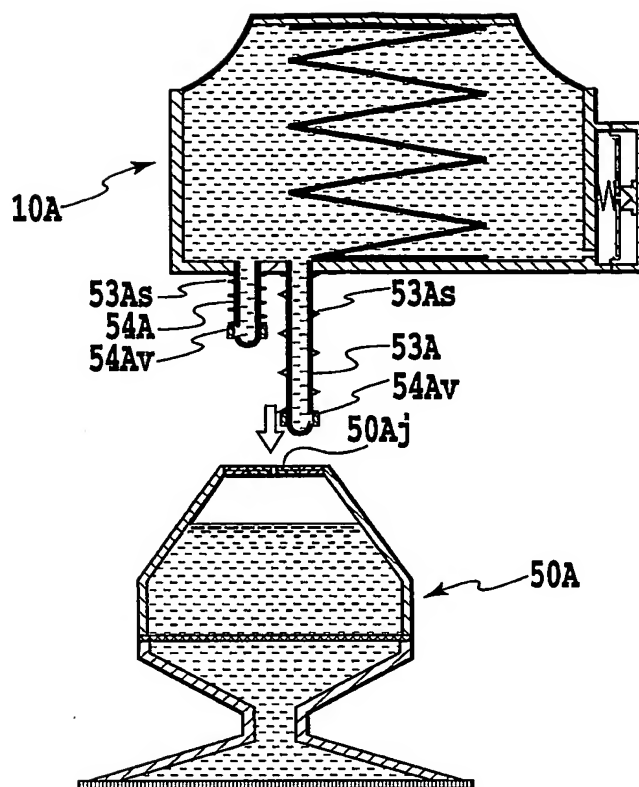


FIG.15A

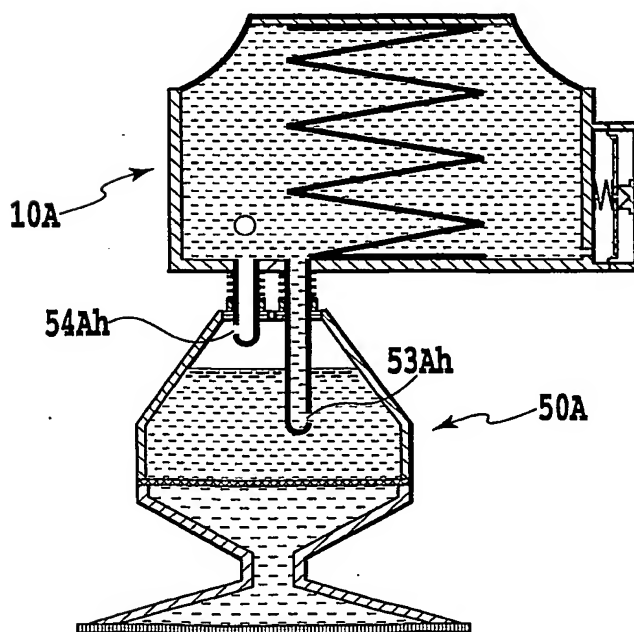


FIG.15B

10/529101

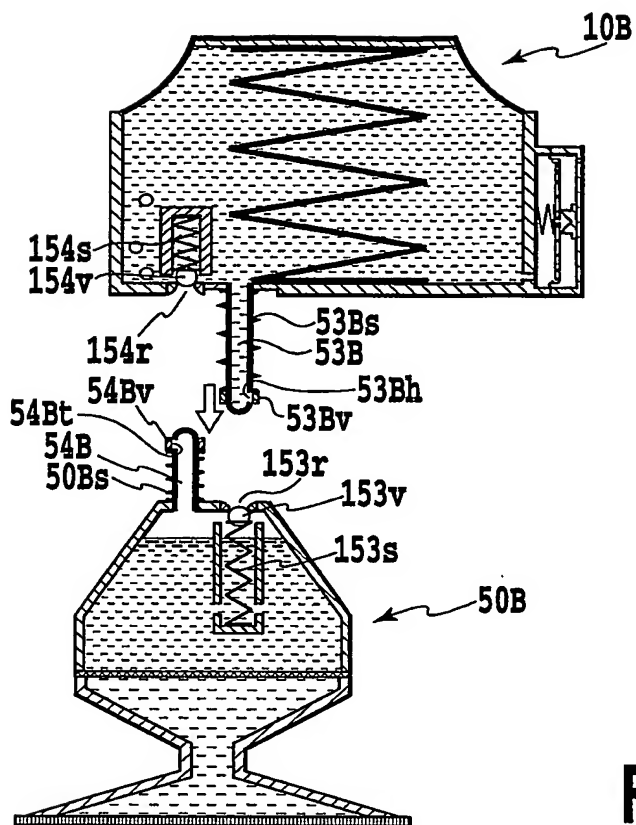


FIG. 16A

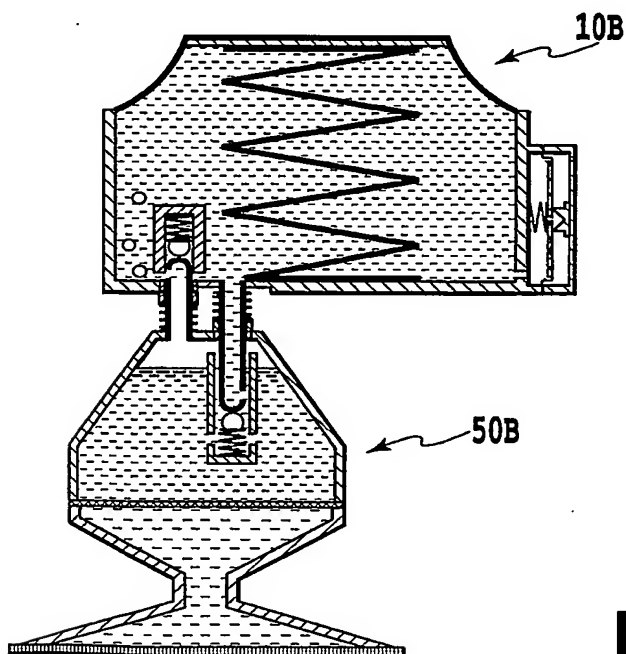


FIG. 16B

10/529101

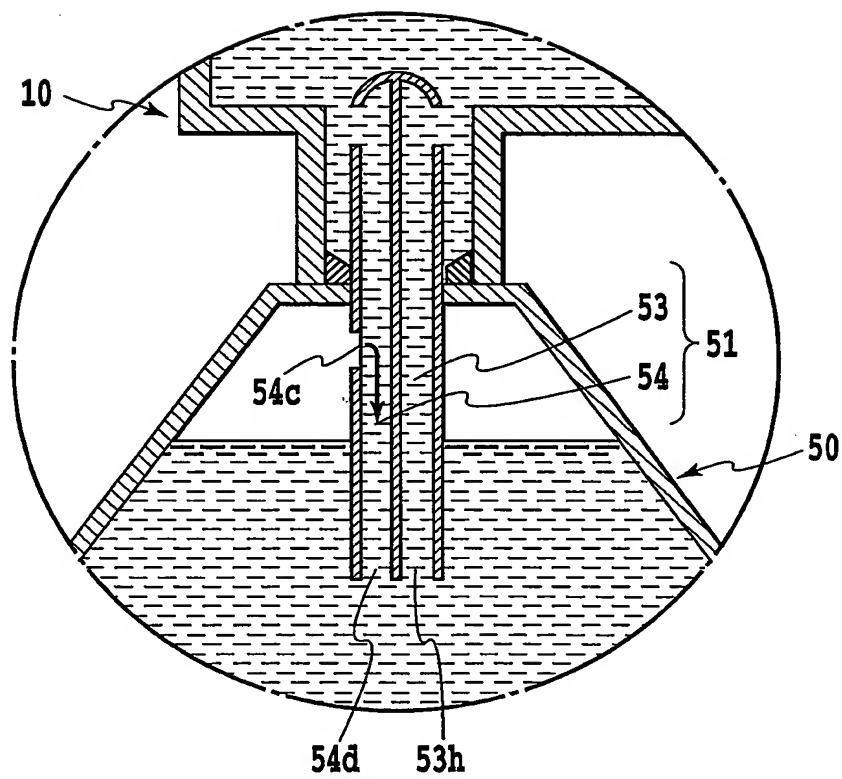


FIG.17

10/529101

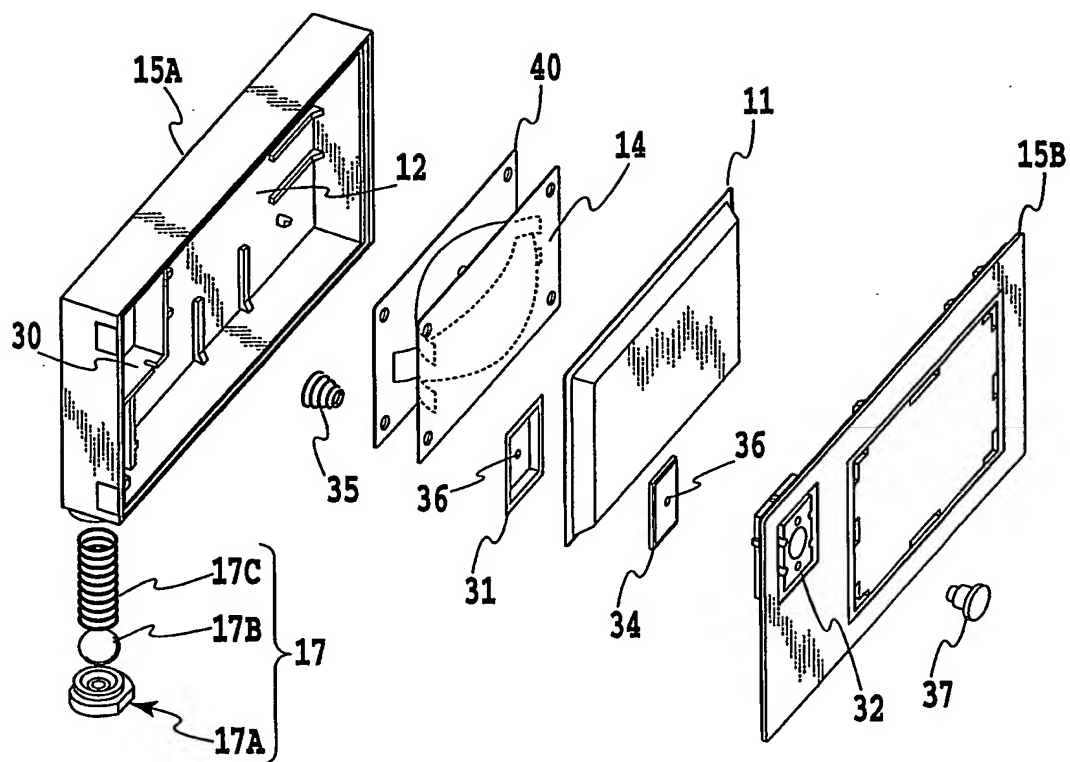


FIG.18A





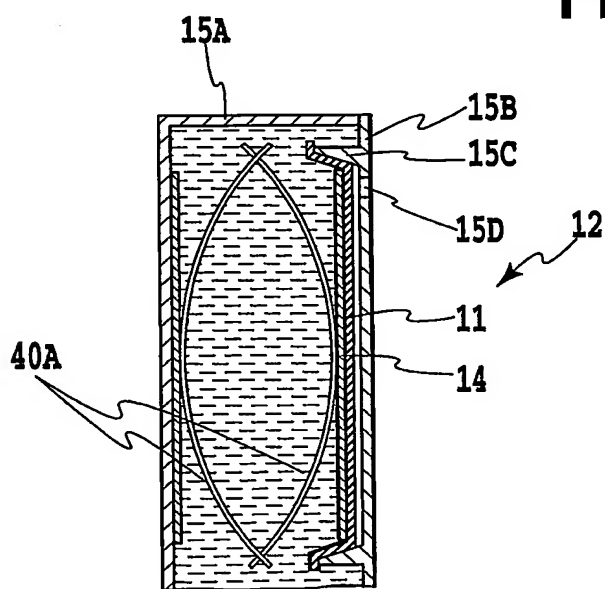


FIG.18B

10/529101

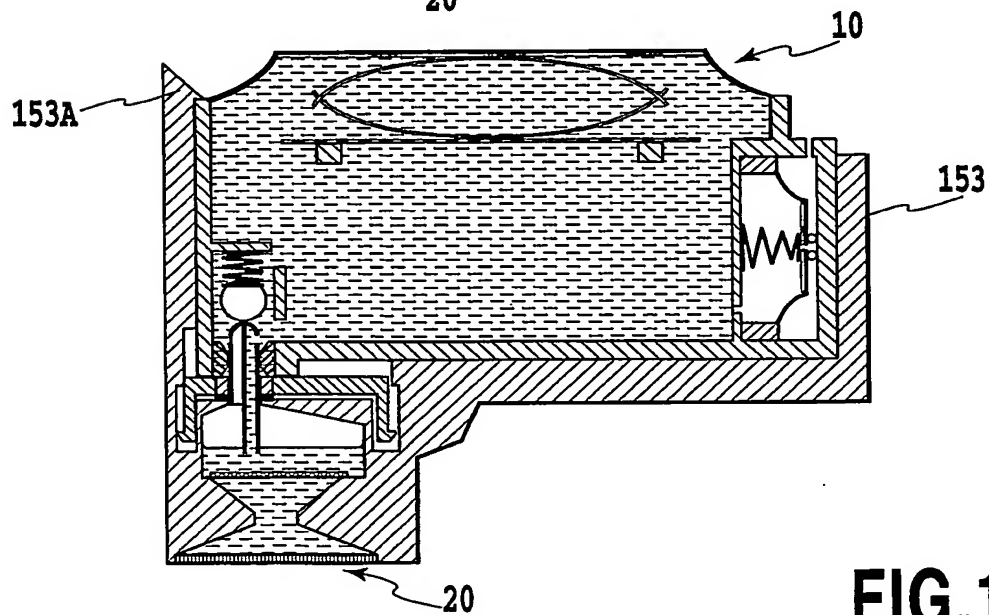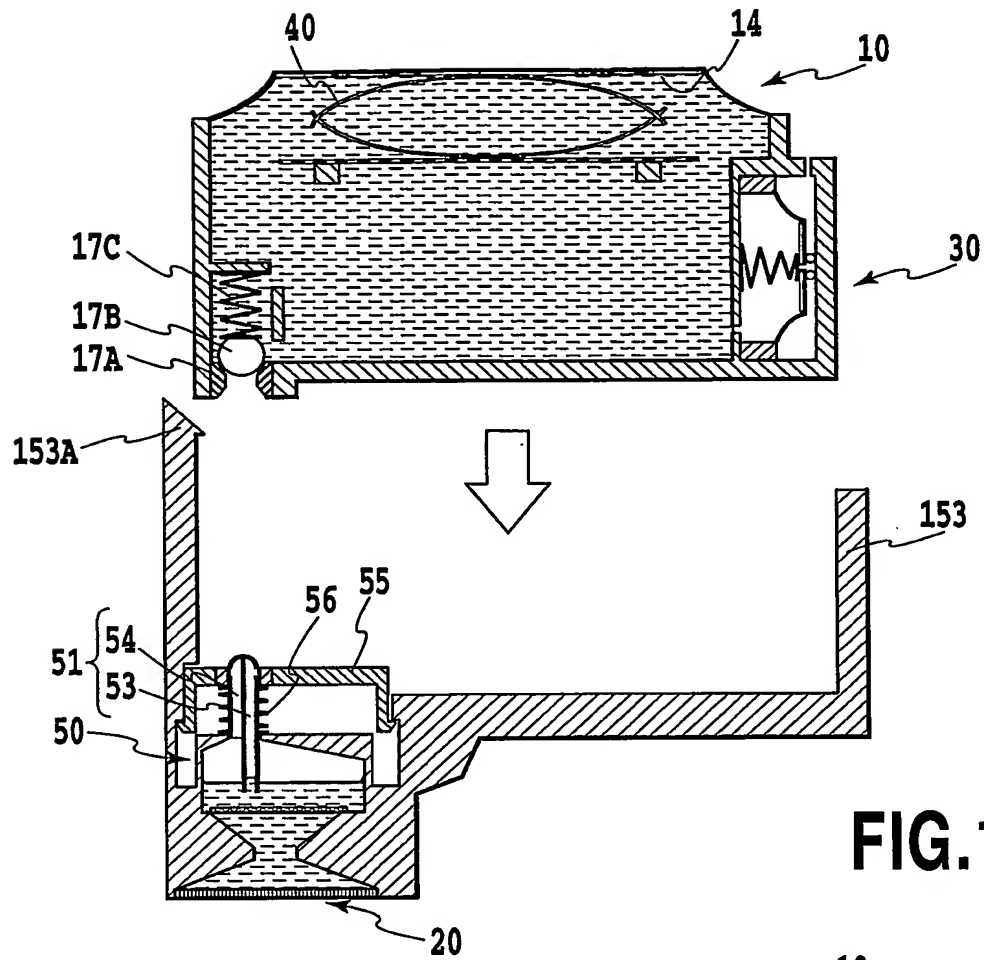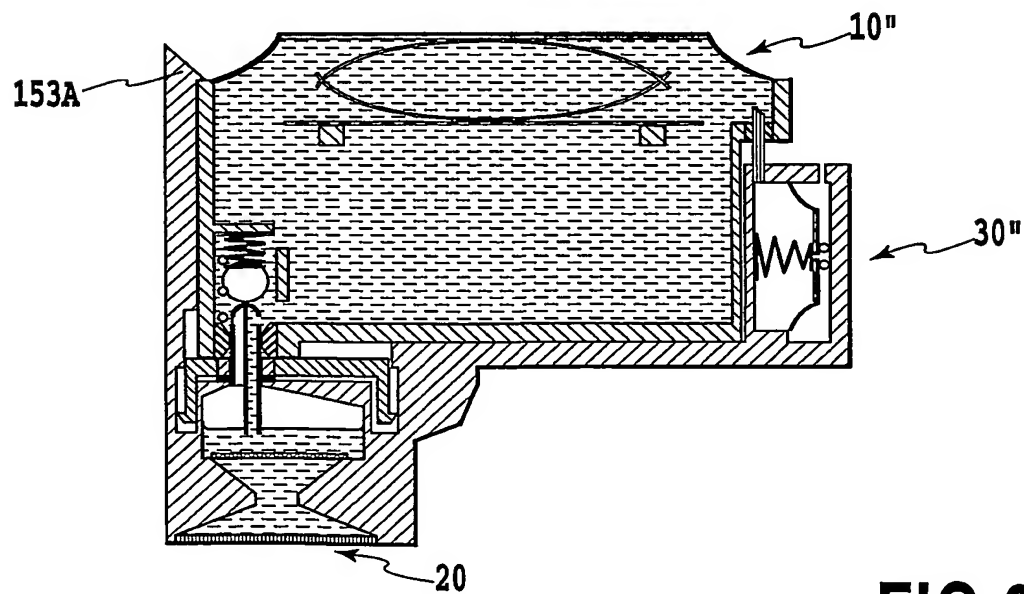

10/529109

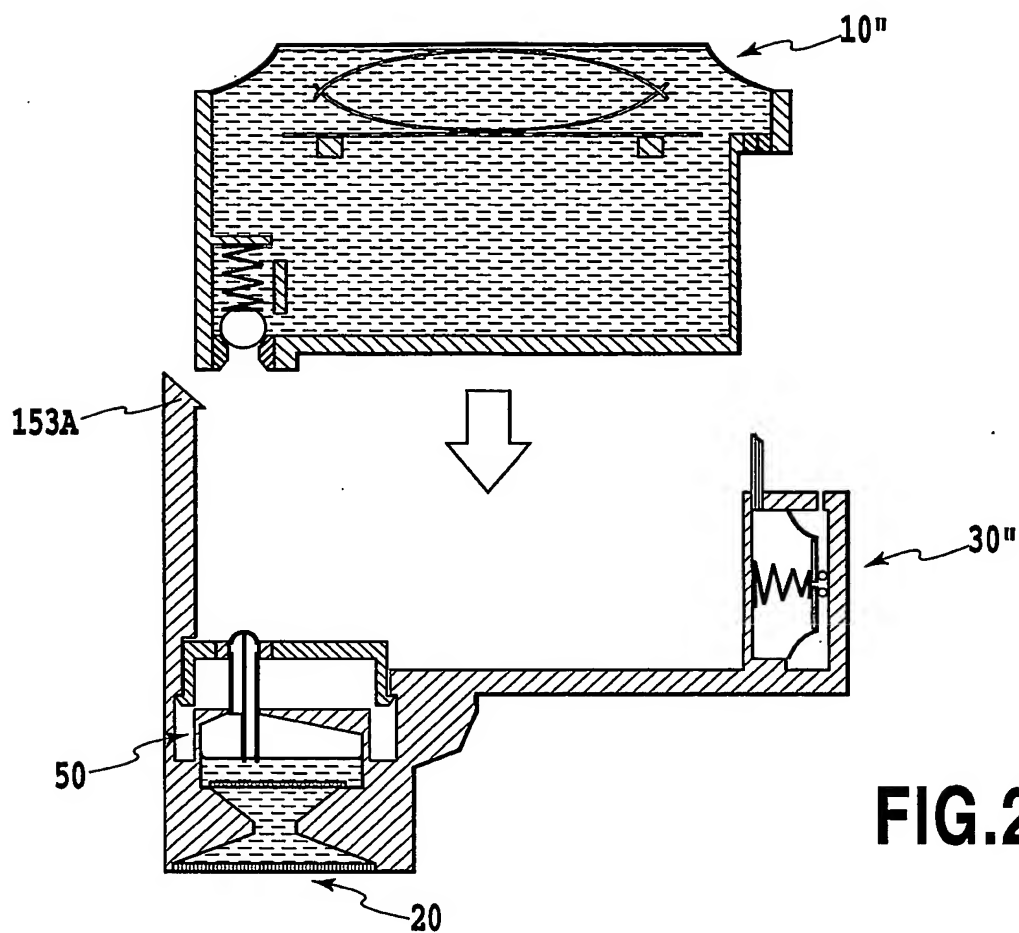

10/529101

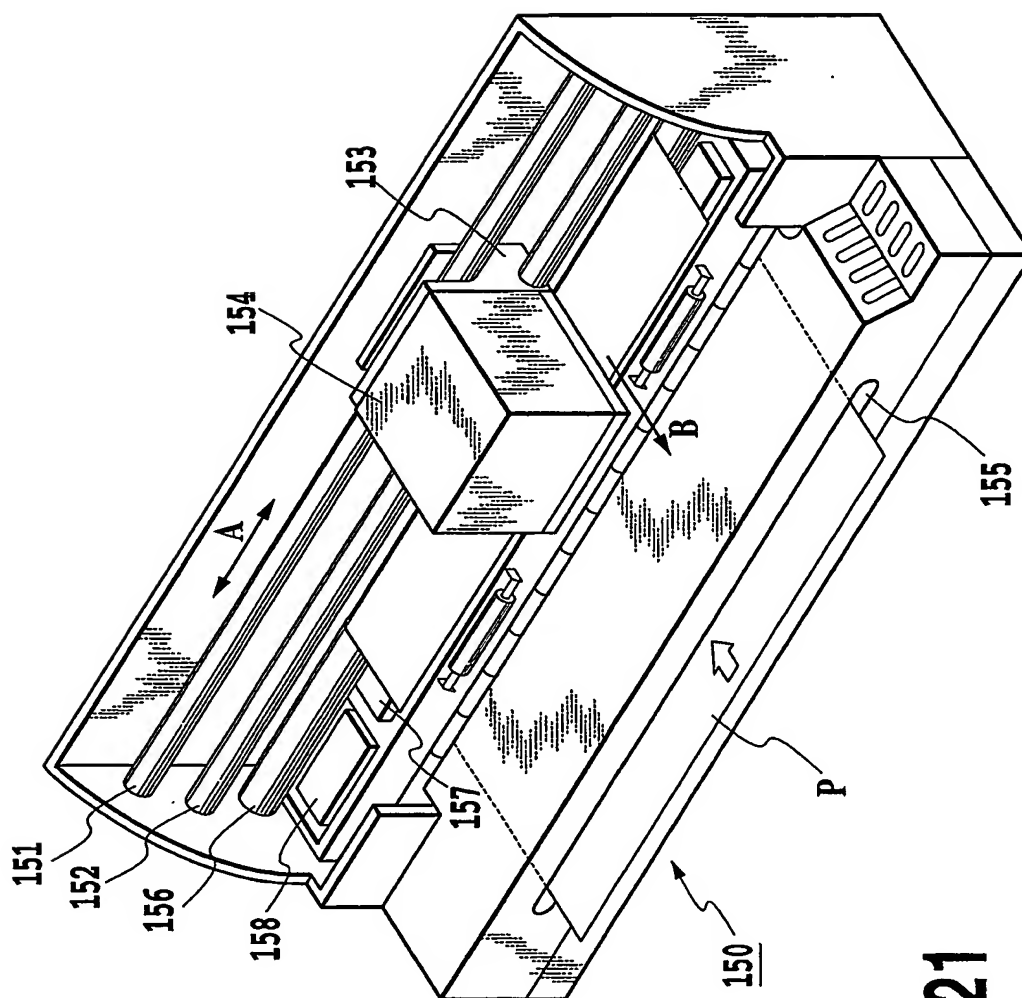


FIG. 21

10/529101

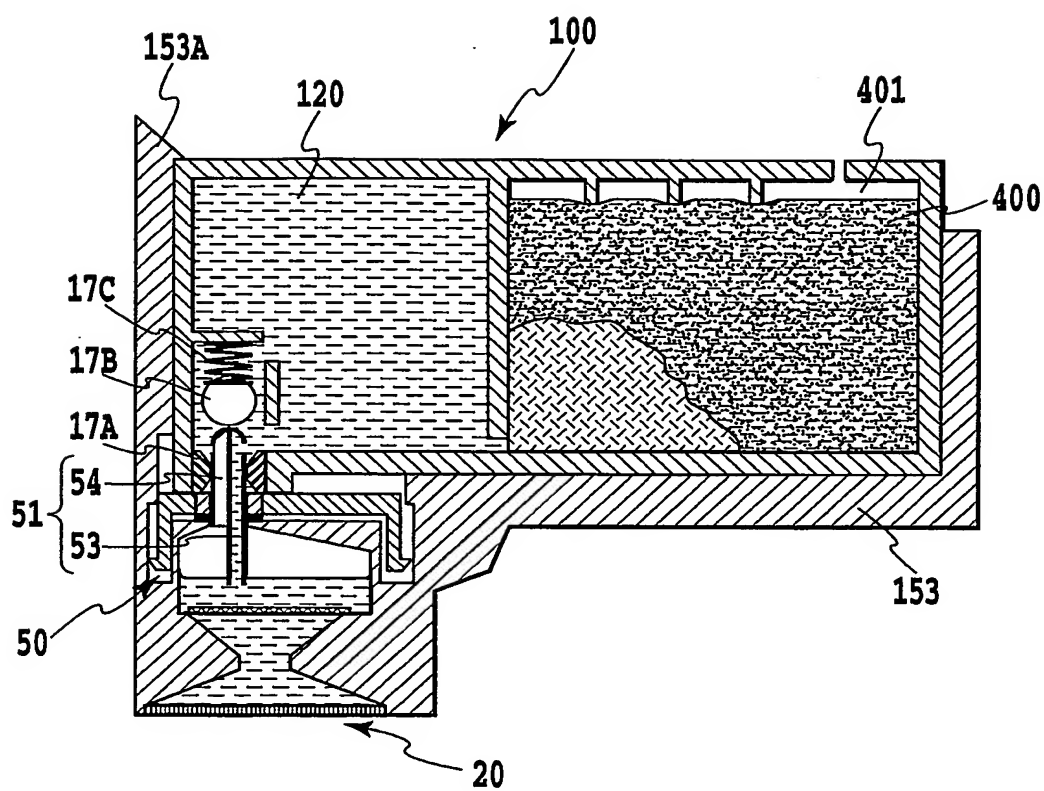


FIG.22



10/529101

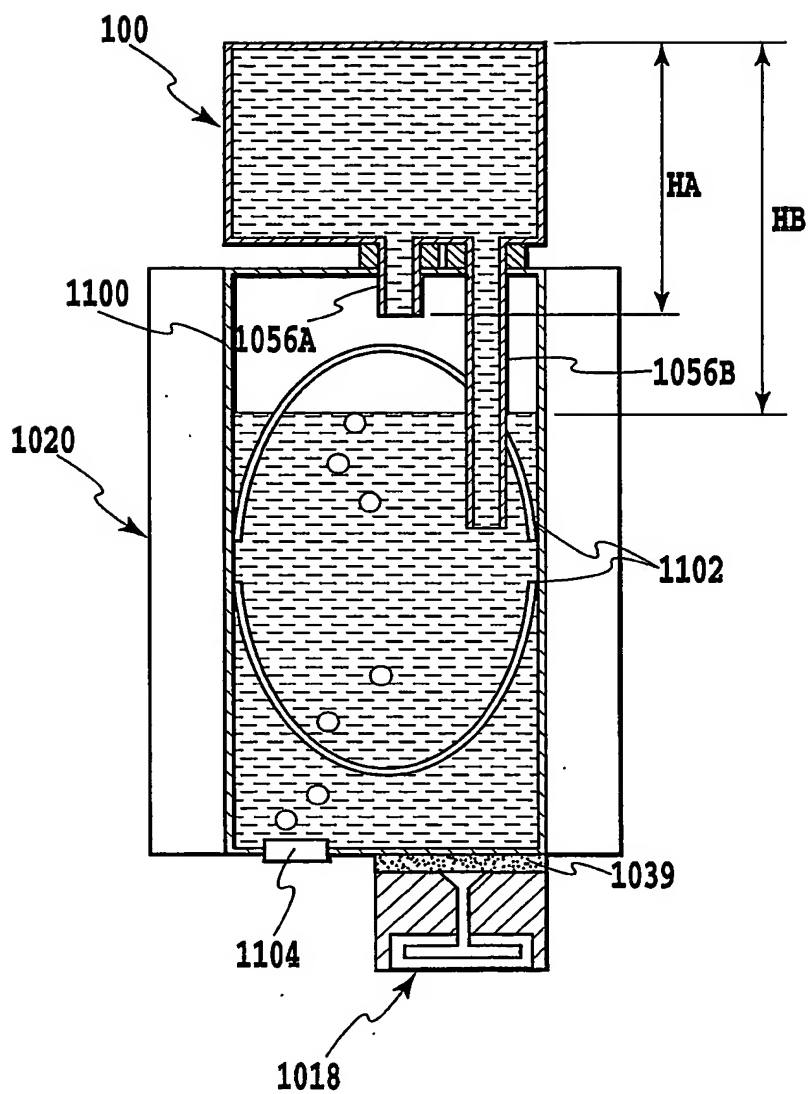


FIG.23

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/12421

## A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl<sup>7</sup> B41J 2/175

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl<sup>7</sup> B41J 2/175

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Japanese Utility Model Gazette 1926-1996, Japanese Publication of Unexamined Utility Model  
Applications 1971-2003, Japanese Registered Utility Model Gazette 1994-2003, Japanese Gazette  
Containing the Utility Model 1996-2003

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| A         | EP 1232870 A1 (CANON KABUSHIKI<br>KAISHA) 2002.08.21<br>& JP 2002-234180 A         | 1-26                  |
| A         | US 2002/0027585 A1 (FUJI XEROX<br>CO., LTD.) 2002.03.07<br>& JP 2002-36557 A       | 1-26                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

27.10.03

Date of mailing of the international search report

18.11.03

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

YUKIHIRO KIRIHATA



2P

9606

Telephone No. +81-3-3581-1101 Ext. 3221